



## Table of Contents

Table of Contents .....	1
Quick Start Guide .....	5
Step 1: Install the DevCom2000 application .....	5
Step 2: Connect the HART Modem to your PC .....	5
Step 3: Connect your HART Modem to the HART device .....	5
Step 4: Activate DevCom2000 .....	6
Step 5: Set the DevCom2000 Serial Port (COM Port) Number of the HART Modem .....	6
Step 6: Browsing a HART Device .....	6
Step 7: Modifying the HART Device's Configuration .....	7
Step 8: Performing Maintenance and Testing the HART Device .....	7
Step 9: Exit .....	7
1 INTRODUCTION .....	8
1.1 Acronyms and Definitions .....	8
1.2 Conventions Used in This Manual .....	8
1.3 Document Organization .....	8
1.4 Getting Help .....	9
2 OVERVIEW OF DEVCOM2000 .....	10
3 SYSTEM REQUIREMENTS .....	11
4 DEVCOM2000 INSTALLATION .....	12
4.1 Prerequisites .....	12
4.2 Installing the DevCom2000 Application .....	12
4.3 Activating DevCom2000 .....	12
4.4 Connecting to the HART Network .....	15
4.5 Uninstalling the DevCom2000 Application .....	16
5 USING DEVCOM2000 .....	17
5.1 Starting DevCom2000 .....	17
5.2 Getting Familiarised with DevCom2000 Explorer .....	19

5.2.1	Using the Menus .....	19
5.2.2	Using the Toolbar .....	20
5.2.3	Familiarising with Icons .....	21
6	FUNCTIONS AND BASIC OPERATIONS .....	22
6.1	Overview .....	22
	Variable .....	22
	Edit Display.....	22
	Method / Standard Operating Procedure (SOP) .....	22
6.2	Viewing Device Configuration (typical, actual view may change based on DD) .....	22
6.3	Configuring Device Information .....	23
6.3.1	Overview .....	23
6.3.2	Variable .....	24
6.3.3	Edit Display .....	26
6.3.4	Executing Methods or Standard Operating Procedures .....	28
6.4	Calibrating HART Field Devices.....	29
6.5	Viewing the Device Status .....	29
6.6	Viewing the Communication Log .....	30
6.7	Viewing the Event-Status Log.....	31
6.8	Saving Device Configuration to Disk.....	32
6.9	Download Configuration to Device .....	34
6.10	Customizing PDF File Output.....	35
6.11	License File Transfers .....	37
6.11.1	Check-In.....	37
6.12	Options Menu .....	38
6.12.1	Options → Basic .....	38
6.12.3	Options → Search .....	43
6.12.4	Options → Advanced .....	47
6.13	Trending .....	53
6.13.1	Define Trend.....	53
6.13.2	View Current Trend .....	54
6.13.3	View Past Trends .....	57
6.13.4	Stop Current Trend.....	60
6.14	DD Functions .....	61
6.14.1	Adding a DD.....	61
6.14.2	Updating a DD Label.....	62
6.15	HART-IP Communication.....	64
	Specifications: .....	68
	Appendix A.....	69

Troubleshooting Guide .....	69
Problem: Will not communicate .....	69
Problem: Get the message "Error opening COMx" .....	69
Problem: No data in the Communication Log.....	69
Problem: The system cannot find the path specified error box .....	70
Problem: Activation by Internet blocked by Firewall.....	70
Problem: Active Windows not shown in Windows drop down list .....	70
Problem: When using HART Server for <i>WirelessHART</i> in Windows 7 device selection screen doesn't appear .....	70
Appendix B .....	71
Contact Information for HART Expert Ltd .....	71
Contact Information for ProComSol Ltd .....	71



## Quick Start Guide

The following steps will allow you to install and quickly begin using DevCom2000. This quick start guide is for experienced HART users, full instructions are provided later in this manual for non-experienced users.

### Step 1: Install the DevCom2000 application

Either using the DevCom2000 installation CD, or the downloaded installation files, install DevCom2000 in its default location. If using the CD and the installation program does not begin automatically, please double click on "DevCom2000Setup.exe" on the CD. This will begin the installation program.

### Step 2: Connect the HART Modem to your PC

Connecting to a wired (4-20mA) HART device requires a HART interface (called a HART Modem) to be connected to your computer, DevCom2000 will work with all HART Modems. There are three types of HART Modem; RS232 (Serial), USB and Bluetooth, all of which are available from [HART Expert Ltd.](http://www.hartexpert.com) Connect your HART modem to your PC. Make a note of the Serial port (COM port) number that your HART Modem is using, if you do not know, please refer to the HART Modem manufacturers literature on how to find out. Later (in Step 5) you will need this information.

**Note:** If you have a RS232 (Serial) HART modem and you are attempting to use it with a "USB to RS232 converter" (e.g. your computer does not have a RS232 port) be aware that many USB to RS232 converters do not provide full conversion. Consequently, many converters do not work with RS232 HART Modems. If you are attempting to use a USB to RS232 converter and are experiencing problems we recommend you buy a USB HART Modem, or a Bluetooth HART Modem.

### Step 3: Connect your HART Modem to the HART device

For communications you must have a suitable load resistance, or a 250Ω Shunt/Loop resistor must be placed in series with the device. Using the clips of the HART Modem connect either: across the loop load resistor (A – B), or across the HART transmitter terminals (C – D). See the relevant Figure 1a, 1b or 1c below.




Figure 1a. Loop Powered HART Transmitter Connection




Figure 1b. 4-Wire HART Transmitter Connection

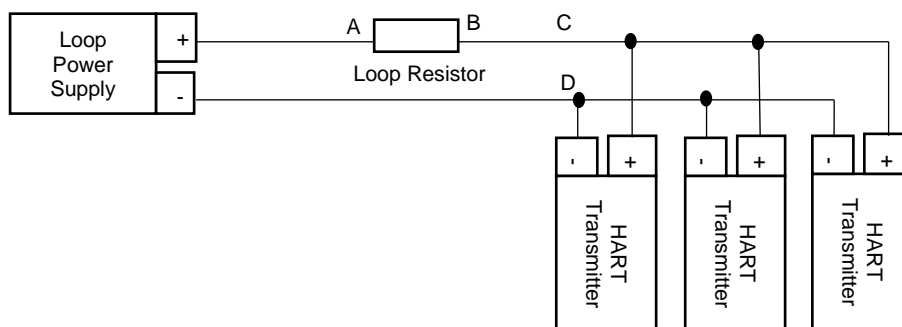


Figure 1c. Multi-drop HART Transmitter Connection

#### Step 4: Activate DevCom2000

Launch DevCom2000 by selecting the DevCom2000 icon on your desktop. You can also start the application by going to your computer's Start Menu and selecting Start → Programs → ProComSol → DevCom2000 → DevCom2000 to launch the program.

You will now be asked to Activate DevCom2000. If you have Activation Codes (located on the CD case, or sent to you by email/letter), select the Activation method of your choice (Manual or Online). Select the Evaluate option if you do not have Activation Codes. You can use DevCom2000 for 10 days before you need to activate it.

If you are Activating DevCom2000 by the online method, select online activation. You will be asked to enter the Activation Codes on the next screen. Once entered, DevCom2000 will connect to the Internet to verify the Activation Codes. If you do not have an internet connection, you can activate it by email or phone using the Manual Activation method. Activation details are fully explained later in this manual.

Activation only needs to occur once.

#### Step 5: Set the DevCom2000 Serial Port (COM Port) Number of the HART Modem

DevCom2000 uses a default serial port of COM99. The serial port must be changed from Options → Basic on the DevCom2000 menu to the appropriate serial port (COM port) number you noted in step 2. The other settings on the Options tabs typically do not need to be changed.

#### Step 6: Browsing a HART Device

You are now ready to inspect, configure, document, etc. a HART device/network. Operating DevCom2000 is similar to working with Windows Explorer. DevCom2000 communicates to the field device, establishes a connection and learns its identity. Once DevCom2000 knows its identity, DevCom2000 locates the device's DD and loads it. From this point forward operation of DevCom2000 is determined by the DD provided by the product's manufacturer. If a DD for the device is not present, a generic DD will be used.

By default, DevCom2000 will open the Browser window. The organization of the data in this explorer-style window is dictated by the device DD. The left hand tree-pane of this window shows the logical groups of field device data. These are called "Menus". The right hand data-pane shows the data, any sub-groups and any standard operating procedures found on a given menu.

You can browse through the field device data by expanding (click "+" symbol) or collapsing (click the "-" symbol) the menus in the tree-pane. You can also double-click the folder symbol when seen on the data-pane.

### Step 7: Modifying the HART Device's Configuration

The Browser allows access to all of the data exactly as described by the product's manufacturer's DD. When you find elements of the field device's configuration you want to change, simply double-click and edit the data. Once you have changed the configuration to suit your needs, press the Send icon to commit the data and transfer it to the field device.

### Step 8: Performing Maintenance and Testing the HART Device

Many devices perform Methods or Standard Operating Procedures (SOPs) that may need to be performed to ensure the device is in peak condition. These Methods may include calibrating the loop current, trimming the transducer values or performing some diagnostic test on the field device. Methods appear in the data-pane just like data does. Double-click on the Method and it will start running in a separate window. The Method will guide you through the process ensuring the procedure is completely and consistently performed. When the Method is complete the window will disappear.

### Step 9: Exit

When you are through working on the field device simply exit DevCom2000. Once the program exits, you can then disconnect the HART interface hardware.

If you have any questions please do contact HART Expert Ltd, advice and support is free.

HART Expert Ltd  
31 Kingfisher Way  
Romsey  
Hampshire  
SO51 7RY  
United Kingdom

Telephone: +44(0)7966233639  
Email: [info@hart-expert.co.uk](mailto:info@hart-expert.co.uk)  
Web: [www.hart-expert.co.uk](http://www.hart-expert.co.uk)

## 1 INTRODUCTION

The HART Communicator Software (DevCom2000) allows access to and management of a HART devices. This manual provides the information about the Hardware setup, Communication with HART devices, and functions of DevCom2000.

DevCom2000 uses Device Description files (DDs) to access data stored in the memory of the HART field device. DevCom2000 is unique in that it uses the DD of the connected device to determine what information to display, what variables are available for edit, and what procedures to follow for calibration, setup, and maintenance.

These DDs are developed by device manufacturers for their products and, in turn, distributed by the HART® Communication Foundation (HCF) worldwide. The latest DDs are included as part of the DevCom2000 installation, and you are automatically sent new DD releases for the first year. At any time (e.g. after the automatic updates have ceased) you can download new DD files from the HCF website ([www.hartcomm.org](http://www.hartcomm.org)).

### 1.1 Acronyms and Definitions

Acronym	Definition
COTS	Commercial-off-the-Shelf
DD	Device Description file, this contains the device information
DDL	Device Description Language
HCF	HART Communication Foundation
DevCom2000	HART Device Communicator Software

### 1.2 Conventions Used in This Manual

Following formatting conventions are used in this guide:

Convention	Description
Words in <b>bold</b> type	Field names including buttons in the display, or important phrases
→ Arrow	Windows pull down menus and their options are separated by → For example, click <b>Device</b> → <b>New Device</b> to connect to a new device
Courier font	Information that you type, parts of the code quoted for explanations or as examples
UPPERCASE	Acronyms
UPPERCASE within angle brackets	Command keys For example, press <ENTER>

### 1.3 Document Organization

DevCom2000 user manual is organized into the following sections:

Section 1	Describes the scope and objective of DevCom2000 user manual along with the organization of the remaining part of the manual
Section 2	Provides an overview of the DevCom2000 application and its architecture



Section 3	Provides the information pertaining to hardware and software requirements for the DevCom2000 application
Section 4	Provides the steps to install, activate, and uninstall the DevCom2000 application
Section 5	Provides the steps to start the DevCom2000 application and connecting to field devices
Section 6	This section explains different aspects of the DevCom2000 application and its functionalities

#### 1.4 [Getting Help](#)

If you need help or encounter problems when using DevCom2000 or this guide, please contact HART Expert Ltd. See Appendix B for contact information. Please provide the following information.

Create a text description of the problem. If possible, provide the text in event sequence, which will enable the duplication of the problem. Provide information about the system. This information must include:

- DevCom2000 version and License ID
- Computer information: make, model, CPU type, clock speed, attached peripherals and operating environment (Windows version)
- HART Device information: make, model, and device revision
- Point of contact: complete mailing address, telephone number, and e-mail address,
- The date and time of the problem occurrence

## 2 OVERVIEW OF DEVCOM2000

Field devices such as flow, pressure, level, temperature transmitters, and valve positioners provide the physical connection to the process. These devices allow the control system to monitor and manipulate process conditions. HART devices maintain a real-time database of process, configuration, identification, and diagnostic information. This information can be accessed using the HART Field Communications Protocol.

HART devices are capable of providing functions and features far beyond the basic task of providing a process input or accepting a control output to manipulate process conditions. Many HART compatible device manufactures create a DD (Device Description) describing all of these functions and features specific to that device. The DD also provides information essential to the successful configuration and calibration of the device.

DevCom2000 uses these DD's to access the data stored in a device, providing full configuration and setup support for all registered HART DD's.

DevCom2000 accesses and presents field device data based solely on its DD. No other files, information or custom drivers are required. DevCom2000 is intended to monitor and configure a single device at a time, it is directly connected to the current loop of the particular device and:

- Provides user interface to configure the HART field device,
- Provides a means to configure and view all the parameters related to HART field device, and
- Provides an option to view the detailed status and diagnostic capability of the device.

DevCom2000 allows viewing and modifying of field device parameters based on the DD. Using the device's DD, DevCom2000 performs various tests to verify the proper operation of the HART device. DevCom2000 runs as a standalone software package and must have a HART compatible modem attached to the system to interrogate the HART base devices. A HART modem is not required for HART-IP communications to a *WirelessHART* Gateway. In this case, an Ethernet connection is required.

### 3 SYSTEM REQUIREMENTS

The following minimum system requirements are recommended for operation of DevCom2000.

PC	Processor Speed: Pentium, 600 MHz Memory: 256 MB Hard Disk Space: 500 MB Monitor: 256-color VGA
HART Modem	<a href="#">USB HART modem</a> , or <a href="#">Bluetooth HART modem</a> , or <a href="#">RS-232 HART modem</a> (HART Expert Ltd supplies HART modems). Not needed for HART-IP or <b>Wireless</b> HART
Communication Port	USB, Bluetooth, or RS-232. Ethernet for HART-IP or <b>Wireless</b> HART
Operating System	Windows 32 and 64 bit versions: XP, Vista, 7, 8, 8.1, and 10

## 4 DEVCOM2000 INSTALLATION

### 4.1 Prerequisites

You need to be familiar with the basic functions of the following when installing DevCom2000:

- Microsoft Windows 32 and 64 bit versions: XP, Vista, 7, 8, 8.1, and 10
- A HART communication interface (e.g. HART Modem, HART-IP, *WirelessHART*, etc.)
- A HART field device (e.g. a HART Transmitter such as Pressure, Temperature, Flow, etc)


### 4.2 Installing the DevCom2000 Application

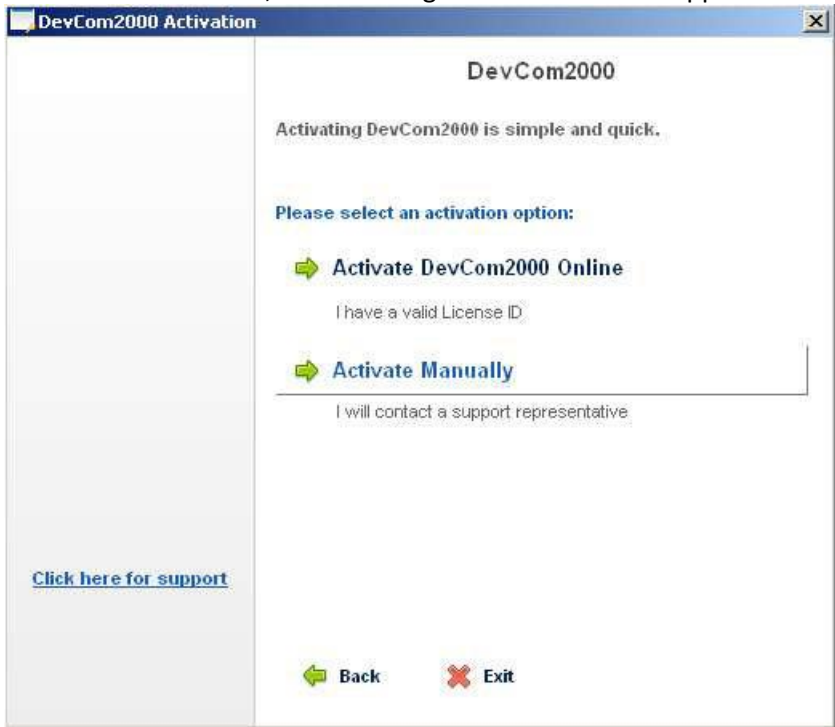

To install the DevCom2000 application in a standalone system, perform the following steps:


Step	Action
1	Insert the DevCom2000 CD into the CD-ROM drive. Auto run should begin installation, if not:
2	Click <b>Start</b> and choose <b>Run</b> . From the Run window, click <b>Browse</b> .
3	In the <b>Look In</b> box, browse to your CD drive.
4	Double-click the drive to access the CD content.
5	Look for the <b>DevCom2000Setup.exe</b> file and double-click the same. This process will take you through a sequence of installation wizard steps.
6	Follow the instructions on the upcoming screens to complete the Installation.

### 4.3 Activating DevCom2000

On first use you will be asked if you want to Activate DevCom2000 (requires a license key) or Evaluate DevCom2000. If you choose to evaluate DevCom2000 it will not run after 10 days. The following describes the procedure.

Step	Action
1	<p>Start the DevCom2000 Application. If this is the first after installation the following window is displayed:</p>  <p>If you want to evaluate DevCom2000 before purchasing, select the “Evaluate DevCom2000” option. You will have 10 days of unlimited program use before you will need to purchase a license. If have not already purchased a DevCom2000 license from the HART Expert Ltd online shop (<a href="http://www.hart-expert.co.uk">www.hart-expert.co.uk</a>) you can select “Purchase DevCom2000 Online” which will take you to the USA based ProComSol Ltd website. Licenses for DevCom2000 can be purchased online from both HART Expert Ltd and ProComSol Ltd.</p>

Step	Action
2	<p>If “Activate DevCom2000” is selected, the following Activation window appears:</p> 
3	<p>If the “Activate DevCom2000 Online” option is selected, the following window appears.</p>  <p>Enter the information from License Key email or the Activation label on the CD case. Select “Continue” to process the information. If the codes were successfully entered, the program will continue as normal. You will not need to perform the activation process again.</p>

Step	Action
4	<p>If the "Activate Manually" option is selected, the following window appears:</p>  <p>You will then need to contact HART Expert Ltd (UK) or ProComSol Ltd (USA) to obtain the Activation Codes. You must supply the User Codes to the support personnel (your user codes will be different than those shown here). You can register manually in either of the following ways:</p> <ul style="list-style-type: none"> <li>• Call HART Expert Ltd (UK) on +44(0)7966233639, or ProComSol Ltd (USA) on +1.216.221.1550. Please have the program License ID and User Codes ready.</li> <li>• Send an email to <a href="mailto:support@hart-expert.co.uk">support@hart-expert.co.uk</a> (UK) or <a href="mailto:support@procomsol.com">support@procomsol.com</a> (USA) containing your company name, License ID, and User Codes.</li> </ul> <p>The above information will enable us to create the Activation Code information that you will need to enter. If activation is successful, the program continues as normal. You will not need to perform the activation process again.</p>

We have tried to make the Activation process as easy as possible. Contact HART Expert Ltd if you have any difficulties.

#### 4.4 Connecting to the HART Network

The DevCom2000 application communicates with the HART Field Devices through a HART compatible communication interface (e.g., a "HART Modem", "HART-IP", "WirelessHART", etc.). Using this communication interface, you will transmit real-time HART data between DevCom2000 and the connected HART compatible field device(s).

There are a wide variety of HART compatible interfaces. Please follow the manufacturer's instruction for connecting your interface to the PC. This manual assumes you will be using the [USB HART Modem](#) manufactured by ProComSol Ltd, called HM-USB-ISO.

Insert the USB connector on the HM-USB-ISO into your computer's USB port. Using the clips on the wires from the HART interface, connect to the device across the 4-20ma signal. If a suitable load resistance is not available, a 250Ω resistor must be placed in series with the device power supply.

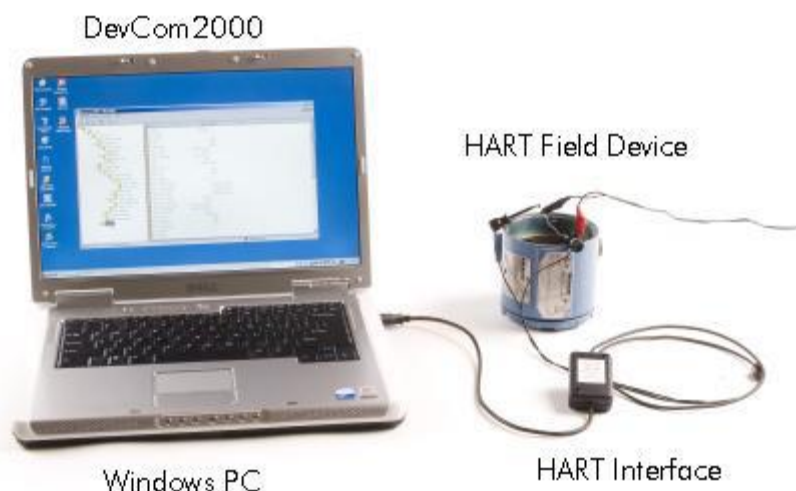


Figure 1 Typical DevCom2000 Hardware Setup

#### 4.5 Uninstalling the DevCom2000 Application

To uninstall the DevCom2000 application, perform the following steps:

Step	Action
1	Click <b>Start</b> → <b>Programs</b> → <b>ProComSol</b> → <b>DevCom2000</b> → <b>Uninstall DevCom2000</b>
2	Or, Click <b>Start</b> → <b>Settings</b> → <b>Control Panel</b> → <b>Add/Remove Programs</b>
3	In the <i>Add/Remove Programs</i> dialog window, select the DevCom2000 program that you want to uninstall.
4	Click <b>Remove</b> .
5	Click <b>OK</b> to confirm the removing of the selected application.

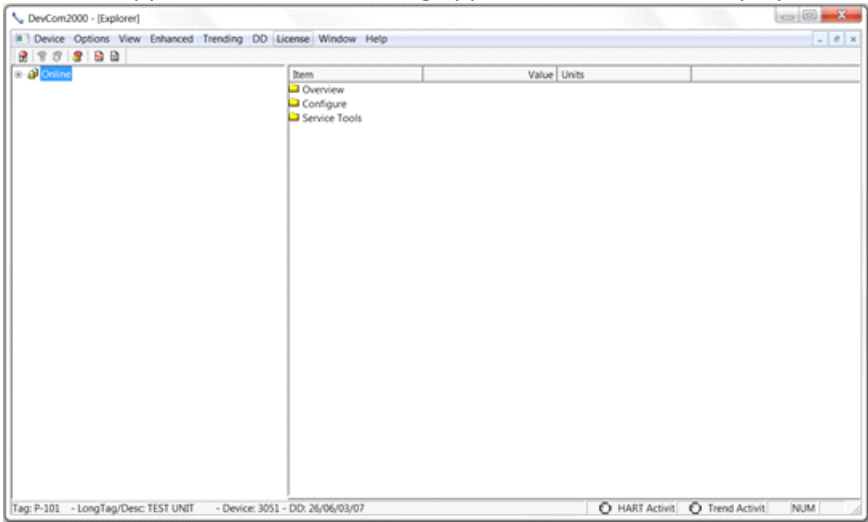


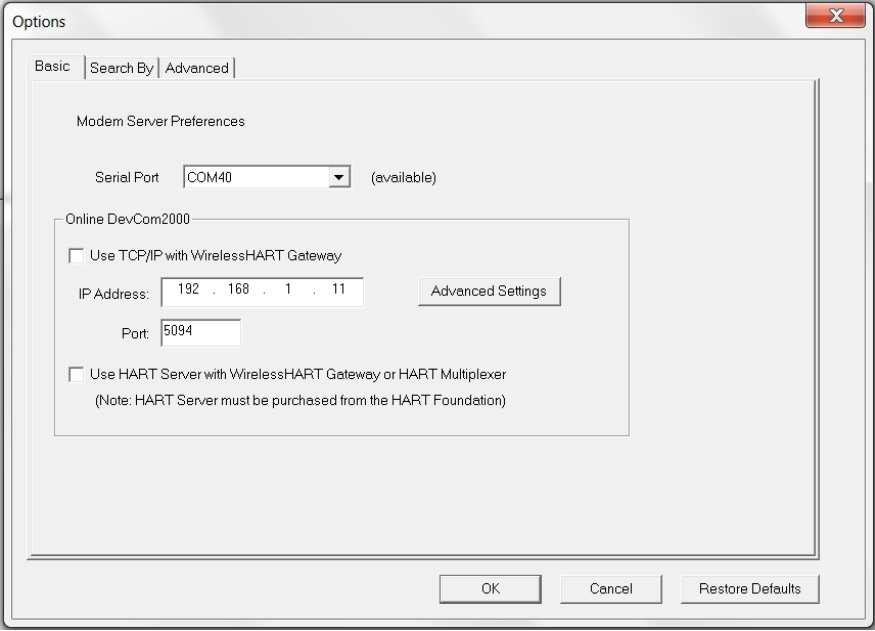
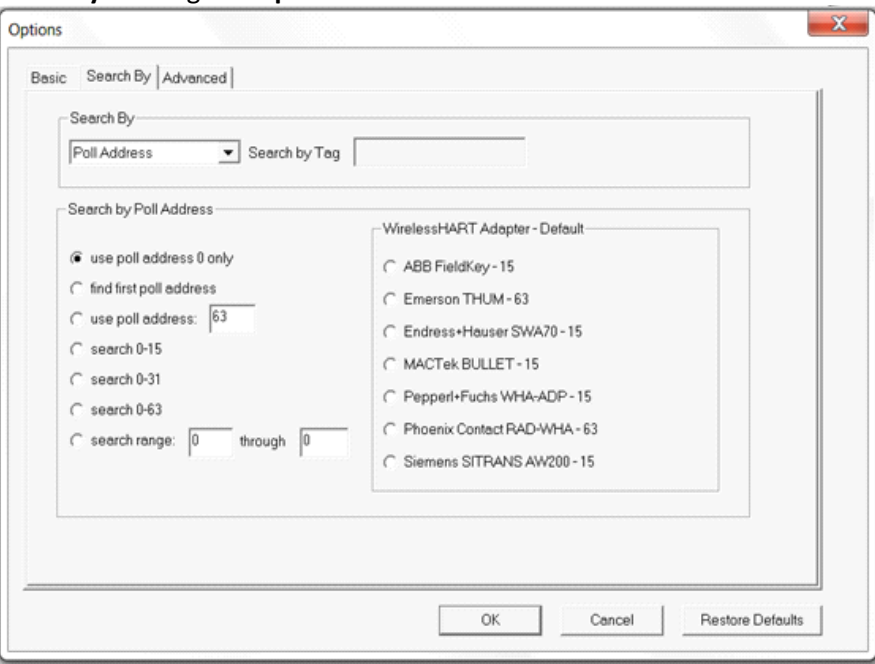
## 5 USING DEVCOM2000

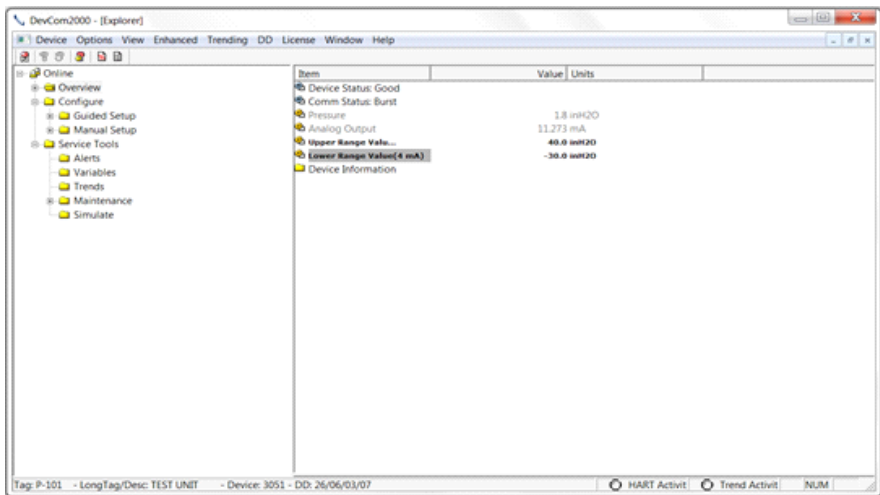
### 5.1 Starting DevCom2000

The HART compatible field device must be connected to a PC or tablet running DevCom2000 to configure or calibrate the field device, or to view the field device's data. Make sure to establish the physical connection between the field device and the DevCom2000 computer. With the physical connection established, launch DevCom2000 by clicking the DevCom2000 icon on your desktop. You can also start the application by going to your computer's Start Menu and selecting **Start → Programs → ProComSol → DevCom2000 → DevCom2000**.

If your computer is running an anti-virus program such as McAfee, you may get a message about a program wanting to access the internet. This is normal. DevCom2000 uses TCP/IP to communicate with the Communication Log program.

Step	Action
1	<p>Start the DevCom2000 Application. The following application window is displayed:</p>  <p>DevCom2000 will then automatically identify the field device and open a communication channel to (i.e. a connection with) the field device.</p>

Step	Action
2	<p>Setting Options <b>Options → Basic</b></p> <p>If communications cannot be established, you may need to change the communication settings using the Options dialog box. The serial port box will show the available com ports. Select the one your HART modem is using.</p>  <p>The screenshot shows the 'Options' dialog box with the 'Basic' tab selected. Under 'Modem Server Preferences', the 'Serial Port' is set to 'COM40'. The 'Online DevCom2000' section has two checkboxes: 'Use TCP/IP with WirelessHART Gateway' (unchecked) and 'Use HART Server with WirelessHART Gateway or HART Multiplexer' (unchecked). The IP Address is set to '192.168.1.11' and the Port is '5094'. There is an 'Advanced Settings' button next to the IP address field. At the bottom are 'OK', 'Cancel', and 'Restore Defaults' buttons.</p>
3	<p>You may also change the polling options for the computer. If you do not know the poll address of the device you are trying to communicate with, use the default address 0 setting. To do this either click on the <b>Search By</b> tab or go to <b>Options → Search</b></p>  <p>The screenshot shows the 'Options' dialog box with the 'Search By' tab selected. Under 'Search By', the 'Poll Address' is set to '0'. The 'Search by Poll Address' section has several radio buttons: 'use poll address 0 only' (selected), 'find first poll address', 'use poll address: 63', 'search 0-15', 'search 0-31', 'search 0-63', and 'search range: 0 through 0'. The 'WirelessHART Adapter - Default' section lists several adapters: ABB FieldKey - 15, Emerson THUM - 63, Endress+Hauser SWA70 - 15, MACTek BULLET - 15, Pepperl+Fuchs WHA-ADP - 15, Phoenix Contact RAD-WHA - 63, and Siemens SITRANS AW200 - 15. At the bottom are 'OK', 'Cancel', and 'Restore Defaults' buttons.</p> <p>Make sure that Poll Address under Search By is selected.</p>

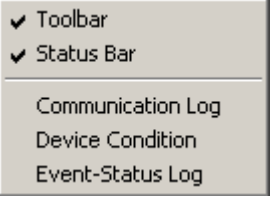
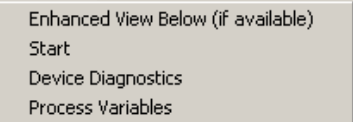




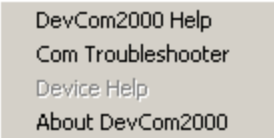
Step	Action
4	<p>When the device is connected to DevCom2000, the browser window appears with online (i.e. root menu) selected.</p>  <p>The left pane of the window shows the menu structure and the right pane of the window displays corresponding parameters of the menu selected.</p> <p>The DevCom2000 screens shown in this document are only an example of what you may see when connected to your field device. What you see is actually controlled by the devices DD file and the device. Hence, the menus, data, status and configurations displayed are specified by the field device's manufacturer when they release the devices DD file.</p>
5	Select the required menu to configure or review the field device's data.

## 5.2 Getting Familiarised with DevCom2000 Explorer

### 5.2.1 Using the Menus

DevCom2000 Explorer provides visual representation and structure of the application window.








Menu	Explanation
<b>Device Menu</b> New Device      Ctrl+N Document Device Download / View Exit	<p>The <b>Device Menu</b> offers the following sub-menu options:</p> <p><b>New Device</b> - Connect to a new device or reconnect to the same device.</p> <p><b>Document Device</b> – Brings up the Document Device dialog box.</p> <p><b>Download / View</b> – Brings up the Download dialog box which provides Configuration File features.</p> <p><b>Exit</b> - Exit DevCom2000.</p>
<b>Options Menu</b> Basic Search Advanced	<p>The <b>Options Menu</b> offers the followings sub-menu options:</p> <p><b>Basic</b>- Select what COM port the device is connected to and use <i>WirelessHART</i> gateway.</p> <p><b>Search</b>- Search by Poll Address, Long or Short Tag.</p> <p><b>Advanced</b>- Select HART Master, Language, and DD Startup</p>

Menu	Explanation
<b>View Menu</b> 	<p>The <b>View Menu</b> offers the following sub-menu options:</p> <p><b>Toolbar</b> - Hide or show the Tool Bar.</p> <p><b>Status Bar</b> - Hide or show the Status Bar.</p> <p><b>Communication Log</b> – Open the Communication Log window.</p> <p><b>Device Condition</b> – View detailed device status.</p> <p><b>Event-Status Log</b> – View log of events and status changes</p>
<p><b>Example of an available Enhanced Menu</b></p>  <p><b>Example of an unavailable Enhanced Menu</b></p> 	<p>The <b>Enhanced Menu</b> offers enhanced device menus. Some devices do not have enhanced menus, this is controlled by the device manufacturer and is specified in the devices DD file. If a device does not have an enhanced menu, this menu will <u>only</u> say “Enhanced View Below (if available)”. To the left are two examples, first a device with enhanced menus, second a device without enhanced menus.</p>
<b>Trending Menu</b> 	<p>The <b>Trending Menu</b> offers the following sub-menu options: <b>Define Trend</b> – Brings up the Define Trend dialog box where a trend is started.</p> <p><b>View Current Trend</b> – Brings up a real time graph of values currently being trended.</p> <p><b>View Past Trends</b> – Brings up the View Trend dialog which contains past trend files. Selected trend files can then be graphed.</p> <p><b>Stop Current Trend</b> – Stops the current log in process.</p>
<b>DD Menu</b> 	<p>The <b>DD Menu</b> offers the following sub-menu options:</p> <p><b>Add DD</b> – Brings up the dialog that adds a DD to the library. Also used to give labels to non-standard library DDs.</p> <p><b>Available DDs</b> – Brings up a browser of all the DDs installed in the library.</p>
<b>DTM Menu</b> 	<p>The <b>DTM Menu</b> offers the following sub-menu options:</p> <p><b>Launch FDT Frame</b>– launches the FDT Frame program.</p>
<b>Help Menu</b> 	<p>The <b>Help Menu</b> offers the following sub-menu options:</p> <p><b>DevCom2000 Help</b> – Brings up Help information for the DevCom2000 application.</p> <p><b>Com Troubleshooter</b> – Brings up the DevCom2000 Com Troubleshooter.</p> <p><b>Device Help</b> – Brings up help information for the connected device (if available).</p> <p><b>About DevCom2000</b> – Shows copyright information, support information, and application Version Number.</p>

### 5.2.2 Using the Toolbar







When you start the application, by default, the toolbar buttons appears on the main window. If it fails to display, click **View → Toolbar** option from the menu bar to bring up the toolbar.

Following are the buttons available in the DevCom2000 application toolbar to perform the necessary tasks:

Button	Description	Corresponding Menu Option
	Connect to a new device	<b>Device → New Device</b>
	Send parameter changes to the device	
	Cancel parameter changes	
	View more status on Device and Communication (Command 48 status)	<b>View → Device Condition</b>
	View Communication log	<b>View → Communication log</b>
	View Event log	<b>View → Event-Status log</b>
	Launch FDT Frame (Future)	<b>DTM → Launch FDT Frame</b>

### 5.2.3 Familiarising with Icons

DevCom2000 application uses different icons to represent different elements of the application. The following table lists the icons and their meanings:

Icon	Meaning
	Indicates a menu or submenu in the navigation tree
	Indicates a currently selected menu or submenu in the navigation tree
	Online menu icon. The actual DD menu comes under this.
	Indicates a “Variable” item
	Indicates a “Method” (Standard Operating Procedure) item
	Indicates an “Edit Display” item

## 6 FUNCTIONS AND BASIC OPERATIONS

### 6.1 Overview

DevCom2000 allows the user to monitor and configure HART devices. Each device is associated with the DD when the device information is present. A DD may contain any of the following parameters/elements:

#### Variable

A variable is defined as the data contained in the device (e.g. Device Firmware Version). There are two types of variables:

- Editable Variable – It allows the operator to modify the value and download it to the device.
- Non-Editable Variable – It is a read-only data from the device.

#### Edit Display

This option is used to view a group of parameters. You can also modify a single parameter from this group, based on which other parameters of the device get altered.

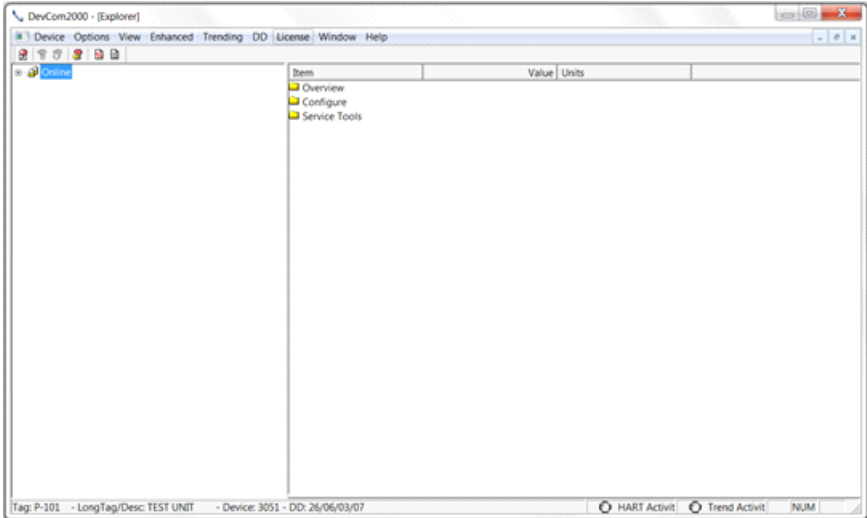
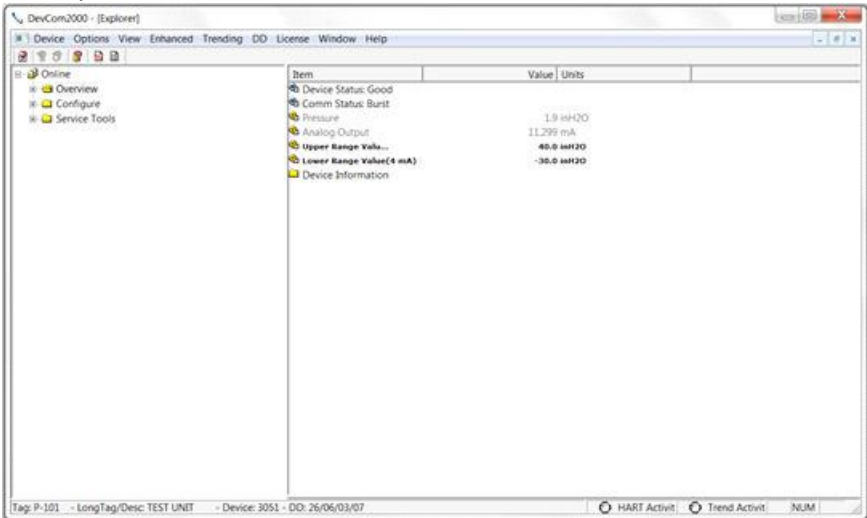
For example, if the Engineering Unit of the device is modified, the corresponding Low Limits and High Limits change as per the Engineering Unit set.

#### Method / Standard Operating Procedure (SOP)

This option helps to perform various tests on the device for instance, Self Test and Loop Test. A Method or SOP is a series of steps that are executed in a sequence results in the completion of some device related tasks. When a method gets invoked, it gives various warning messages and options to the user, by which the user can thoroughly test the device. If a test is aborted by operator command at any stage of the sequence, the method invokes additional steps to bring the device back to its original state before the test was commenced.

### 6.2 Viewing Device Configuration (typical, actual view may change based on DD)

To view the configuration of the device that is connected to DevCom2000, perform the following steps:

Step	Action
1	<p>Ensure that the application is running and communications have been established:</p>  <p>The left pane of the window shows the menu structure and the right pane of the window displays corresponding parameters of the menu selected.</p> <p>The menus that are displayed are defined in the DD file of the particular device.</p> <p>If no DD is available for the device DevCom2000 will select the standard DD. This should provide limited functionality for the device. NOTE: If a parameter is updated that is not supported by the device you will receive an error.</p>
2	<p>Expand the menu by clicking the “+” sign and double-click to view the device parameters. Below is an example of an expanded menu:</p> 
3	<p>Repeat Step 2 to expand sub-menus if required and then select the desired menu / sub-menu to view the associated parameters / device information.</p>

## 6.3 Configuring Device Information

### 6.3.1 Overview

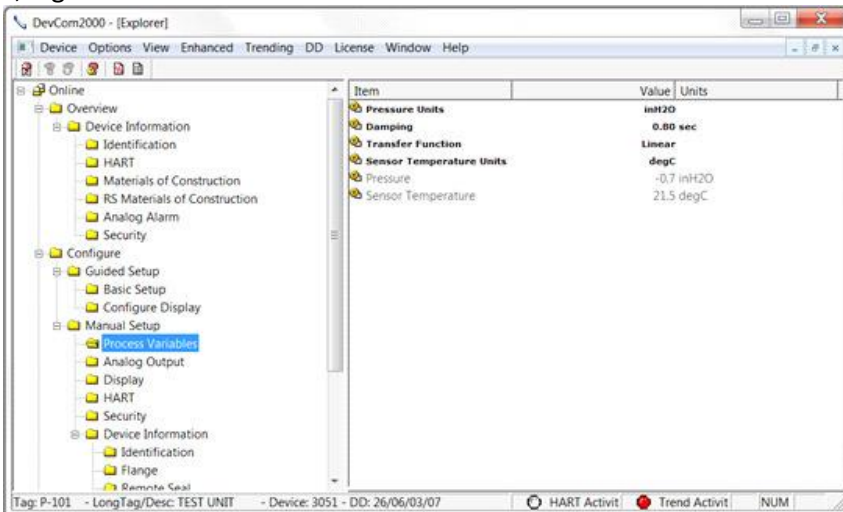
DevCom2000 allows you to view and configure the field device parameters based on the Device Description (DD) file. However, the device vendor defines most of the parameters at the factory. These parameters become read only for the users and the user cannot modify the values. The related variables are grouped under various menus of different levels as defined by the device vendor in the DD file. Expand or collapse the tree view using the “+” or “-” sign to access the device configuration parameters.

The following table describes the details about the device configuration:

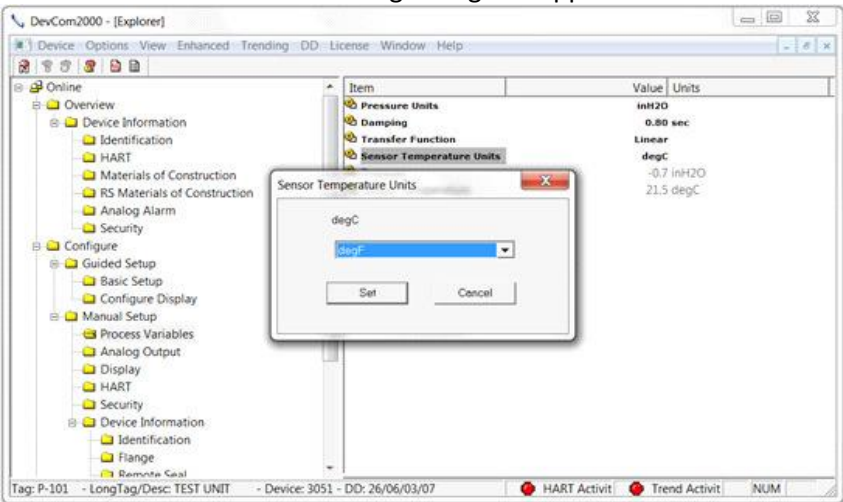
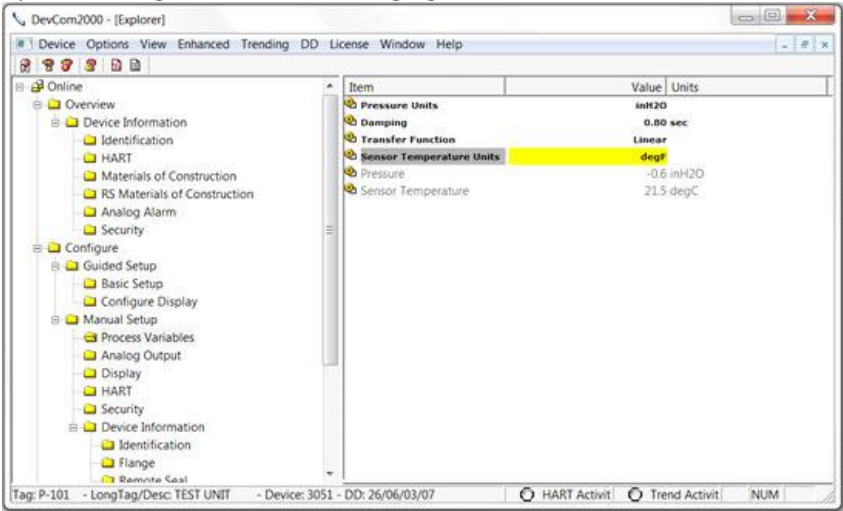

Step	Action
1	Follow the steps in section “6.2 Viewing device configuration” to view the device parameter(s) you want to change, e.g.
2	<p>There are three types of variables: dynamic, read/write and read only. The parameters that are grayed out indicate that these are dynamic variables (variables that get updated online by the device) or read only variables.</p> <p>The status of device parameters are represented as follows:</p> <p><b>Bold Font = Modifiable Values</b>  Normal Font = Menu Item  Gray Font = Dynamic or Read Only Variables</p>
3	From here you can select the parameter and configure the values, as required. However, there are several types of parameter and the topics in the following sections explain how to configure the different device parameter types.

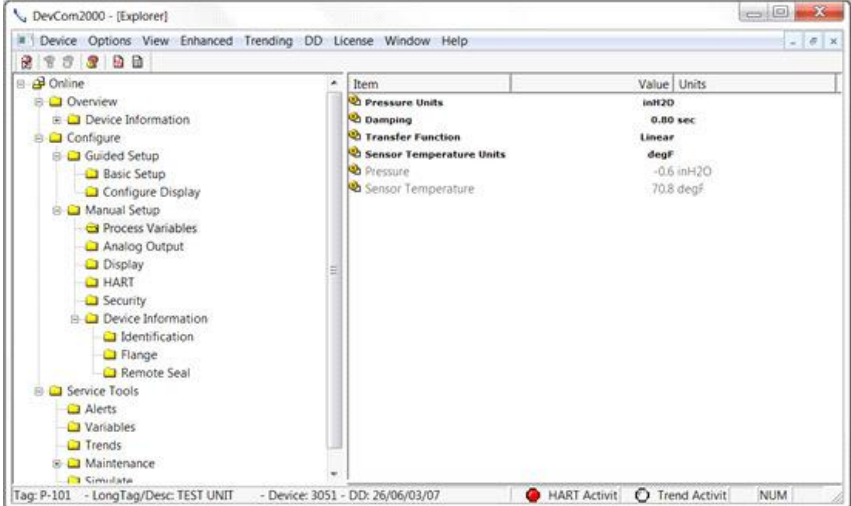
### 6.3.2 Variable

To edit the parameter variables of the connected device, perform the following steps:

Step	Action
1	<p>Follow the steps in section “6.2 Viewing device configuration” to view the device parameter(s) you want to change, e.g.</p> 



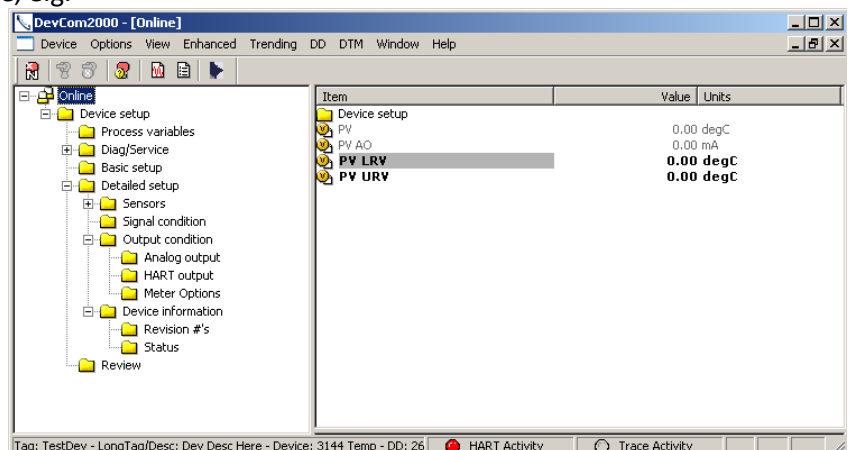
Step	Action
2	<p>Double-click the variable to edit it. The following dialog box appears on the screen:</p> 
3	<p>Make the changes to the parameter value, as required.</p>
4	<p>Click <b>Set</b> to accept the changed value. The change gets reflected as shown:</p> 
5	<p>Click on the <b>Send</b> icon  to commit the changes to the device.</p>

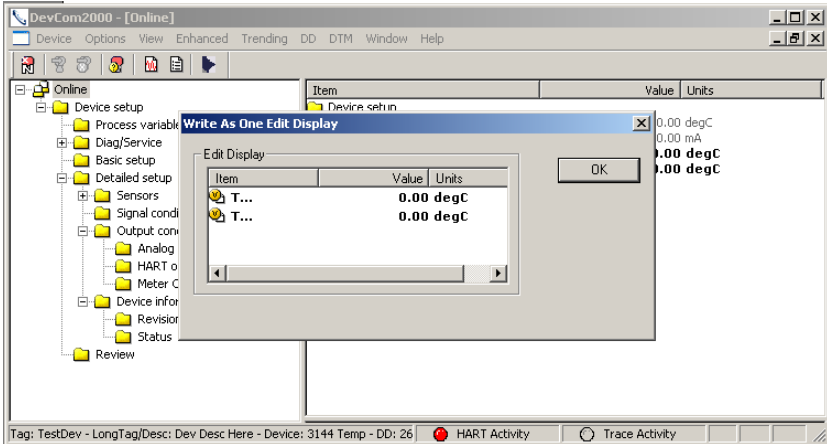
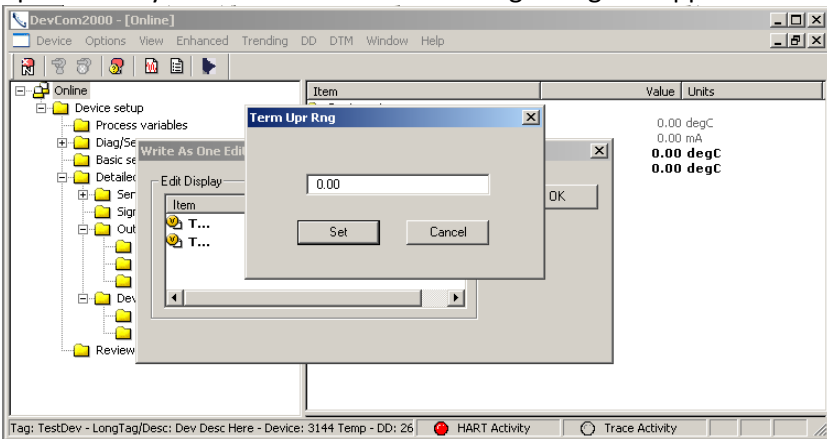
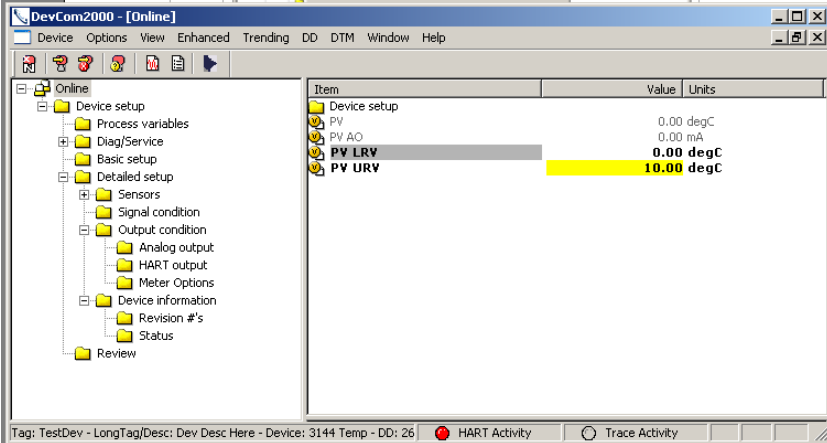
Step	Action
6	<p>When the value is no longer yellow, the variable has been changed in the device.</p>  <p>The Send and Cancel Icon will now be grey as well. This indicates that there are no new changes to be sent to the device.</p>


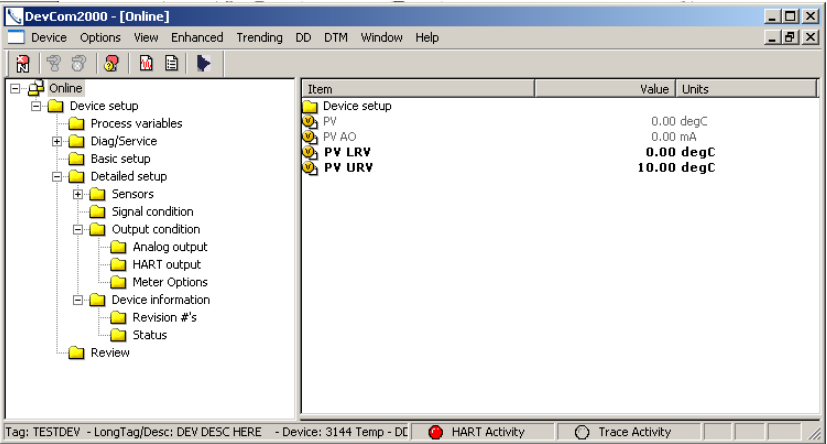
### 6.3.3 Edit Display

The Edit Display is a variation on the Variable edit. An additional window helps the user view a group of parameters based on the DD. You can also modify a single parameter from this group. Parameters linked to the edited field will be updated automatically.

To view and configure these variables, perform the following steps:

Step	Action
1	<p>Follow the steps in section “6.2 Viewing device configuration” to view the device parameter(s) you want to change, e.g.</p> 

Step	Action
2	<p>Double click the parameter you wish to edit. The following dialog box appears on the screen:</p> 
3	<p>Double click the parameter you wish to edit. The following dialog box appears on the screen:</p> 
4	Make the change to the value, as required.
5	Click <b>Set</b> to accept the changes. Or press <b>Cancel</b> to cancel the changes.
6	<p>Click <b>OK</b> to close the dialog box.</p>  <p>Again the yellow means the parameter is changed and ready to be sent to the device.</p>

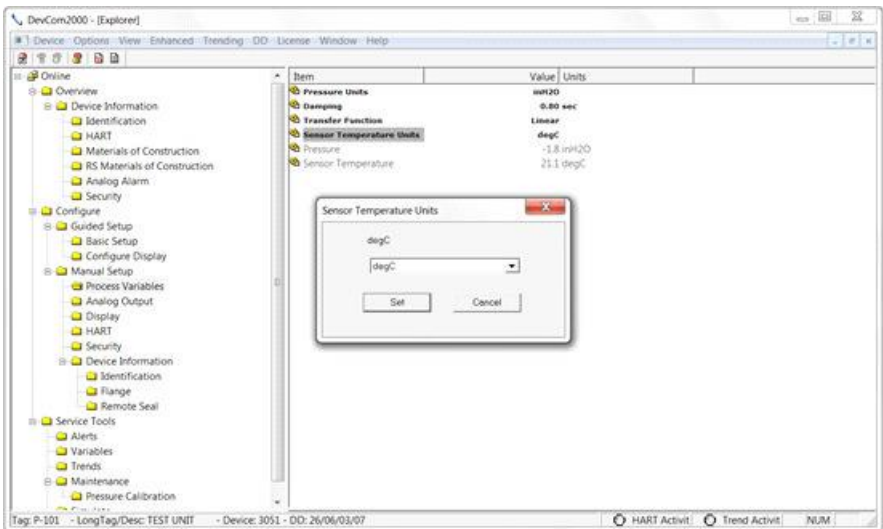
Step	Action
7	<p>Click on the <b>Send</b> icon  to commit the changes to the device.</p>  <p>After being sent the change is reflected in the device info.</p>

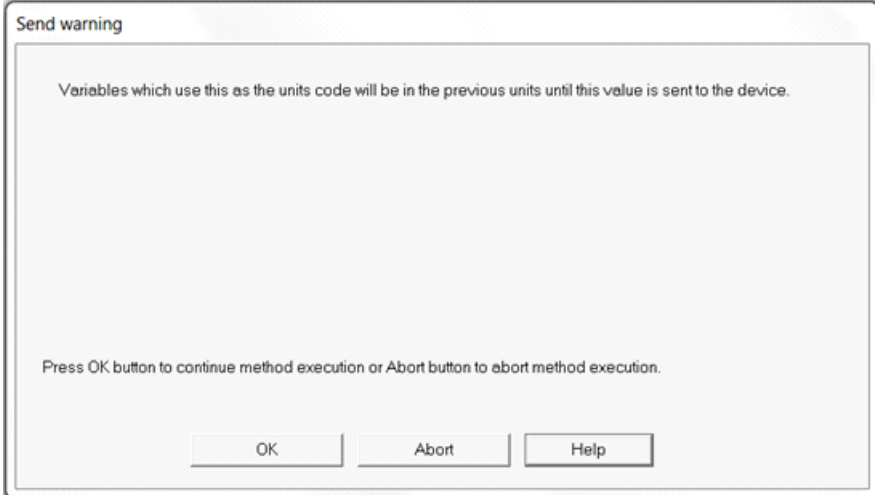
### 6.3.4 Executing Methods or Standard Operating Procedures

Methods are defined in the DD file for the device that DevCom2000 is connected to. You can select the Method and execute it for calibrating the device, trouble shooting, etc. Method execution leads you through a number of steps, like in a wizard.

A Few examples of methods include:

- Setting high and low range calibration points
- Calibration of the device
- Run the advanced diagnostic test procedure
- Execute tests to gather information on device operation. To execute a Method, perform the following steps:

Step	Action
1	<p>Follow the steps in section “6.2 Viewing device configuration” to view the device parameter(s) you want to change, select the parameter where the method is present and double-click to open it.</p> 

Step	Action
2	<p>Click <b>Set</b> to open the Method dialog box (below is an example of a Method dialog box):</p> 
3	<p>Click either:</p> <ul style="list-style-type: none"> <li>• <b>OK</b> to move to the next dialog in the Method sequence.</li> <li>• <b>Abort</b> to cancel the Method execution.</li> <li>• <b>Help</b> to get specific help for that step of the Method. This Help information is provided by the device DD.</li> </ul>

#### 6.4 Calibrating HART Field Devices

Calibration of field devices and loop test are achieved by executing the Methods or Standard Operating Procedures that are specific to device. Methods are defined based on the test parameters specific to the device, providing information for the calibration of that device.

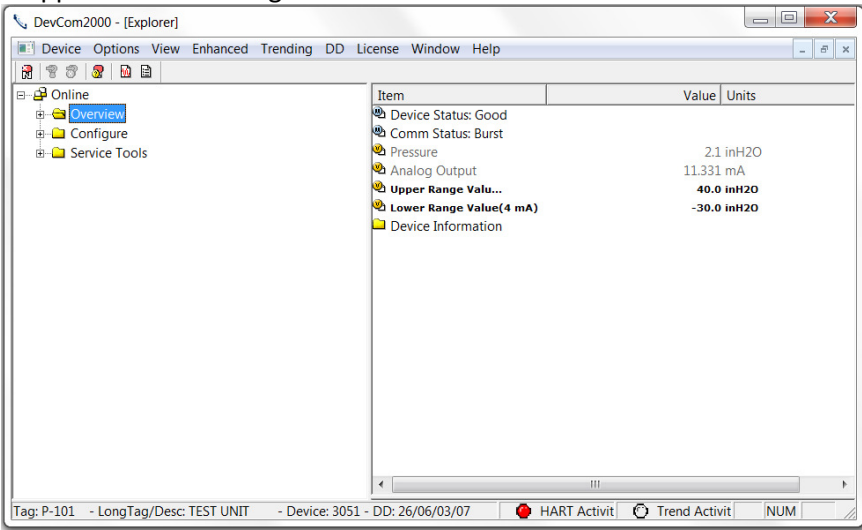

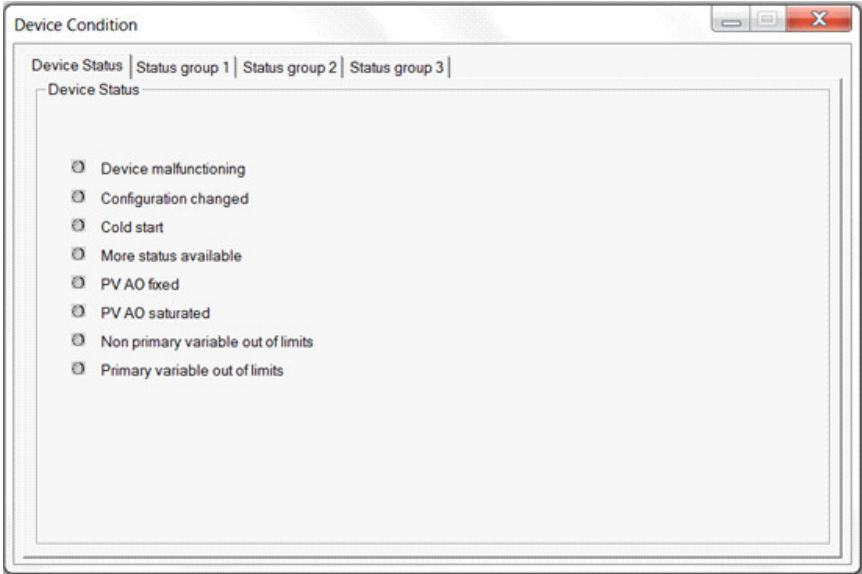
See the previous section for Method execution.

#### 6.5 Viewing the Device Status

DevCom2000 provides the user with the ability to monitor the device specific status of the device and the communication network.

When there is error communicating with the device, it is recognized and indicated to the user. The user can view more details of such errors, using the **View → Device** Condition from the main window.

To view the device and communication status, perform the following steps:

Step	Action
1	<p>Ensure that the application is running and communications have been established:</p> 
2	<p>Select <b>View → Device Condition</b> from the main window or choose the status icon  from the toolbar. Following window is displayed:</p>  <p>The Device Status tab option shows the status of the device and the communication network. The individual status is indicated by green and red LEDs.</p>
4	Additional tabs may be available depending on the DD.
5	Click <b>X</b> to close the Status window.

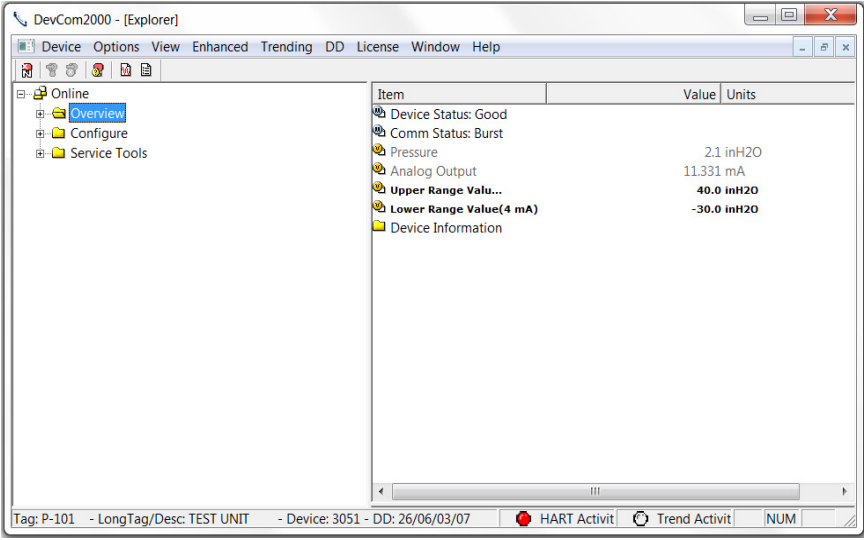
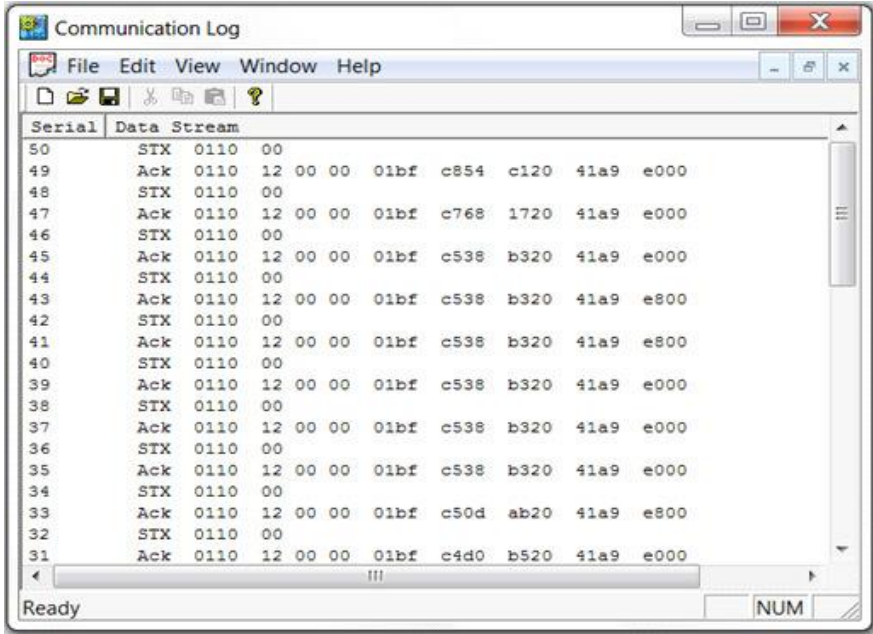
## 6.6 Viewing the Communication Log

DevCom2000 allows the user to view the actual communications between DevCom2000 and the device. You can view send commands and received responses.

If your computer is running an anti-virus program such as McAfee, you may get a message about a program wanting to access the internet when you open the Communication Log. This is normal. DevCom2000 uses TCP/IP to communicate with the Communication Log program.

If no data appears in the Communication Log, this may be due to an anti-virus program. Close the Log window and re-launch.

To view the communication log, perform the following steps:

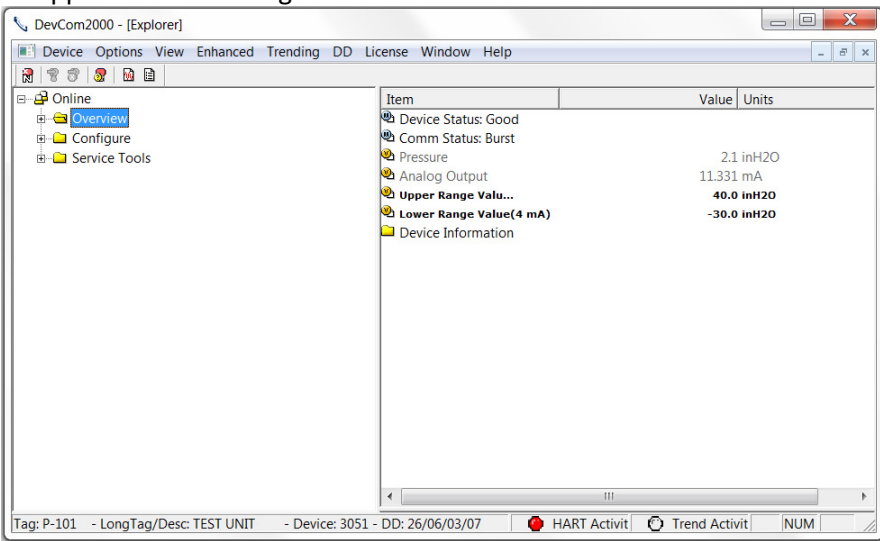

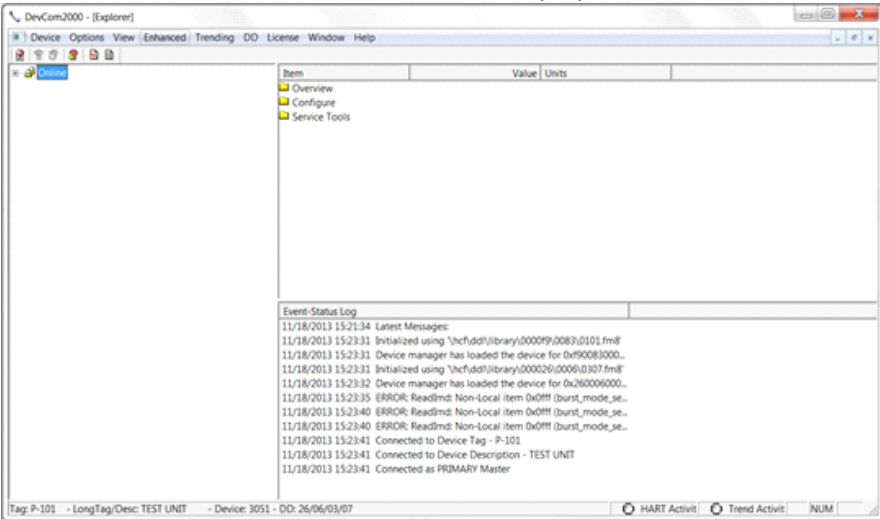

Step	Action
1	<p>Ensure that the application is running and communications have been established</p> 
2	<p>Select <b>View</b> → <b>Communication Log</b> from the main window or choose the communications log icon from the toolbar. The following window is displayed:</p>  <p>Note: The communications log lists actual HART commands and the responses from the unit. A good understanding of the HART protocol is required to interpret this data.</p>
3	<p>Select <b>File</b> → <b>Exit</b> to get back to the main window. Or, close the Communication Log window by clicking on the <b>X</b>.</p>

## 6.7 Viewing the Event-Status Log

DevCom2000 allows the user to view the error conditions of the device and the communication network.

To view the Event-Status Log, perform the following steps:



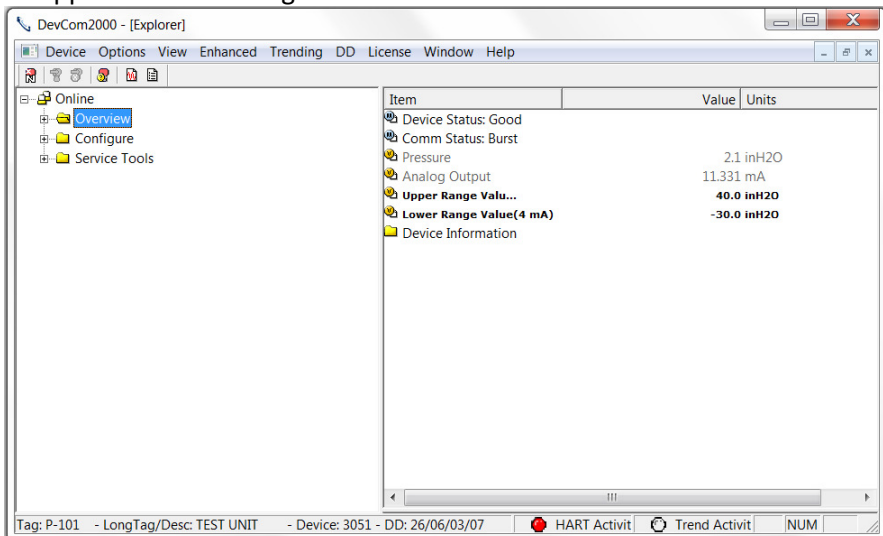

Step	Action
1	<p>Ensure that the application is running and communications have been established:</p> 
2	<p>Select <b>View → Event-Status Log</b> from the main window or choose the Event-Status log icon  from the toolbar. An additional Event Status window is displayed:</p> 
3	<p>To close, go to <b>View → Event-Status Log</b> menu option or click on the  icon to go back to the original window.</p>


## 6.8 Saving Device Configuration to Disk

HART Device configurations can be saved to disk as a text file to document the device. Fields are delimited with a comma so that the data can be imported into configuration management software packages. A PDF version of the configuration is also created.

To save device configurations to disk, perform the following steps:



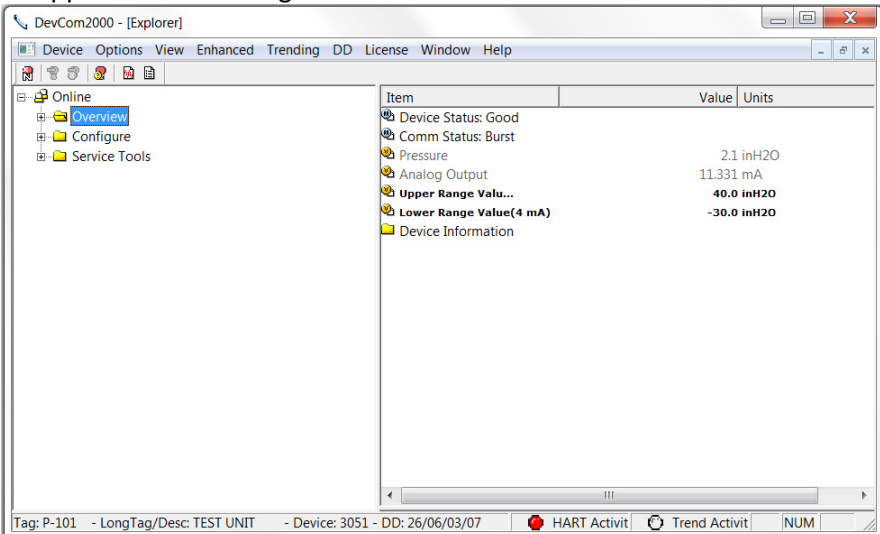
Step	Action
1	<p>Ensure that the application is running and communications have been established:</p> 
2	<p>Select <b>Device</b> → <b>Document Device</b> from the main window. The Document Device Dialog Box is displayed:</p> 
3	<p>The default directory is based on Windows User Accounts. The default file name is Tag Device ID. The directory and filename can be changed by the user. Use the “Browse” button to change directories and/or filenames also.</p>
4	<p>Enter a Note in the Notes: field if desired. Maximum of 250 characters.</p>
5	<p>Press the “Save Device Config” button to save device configuration.</p>

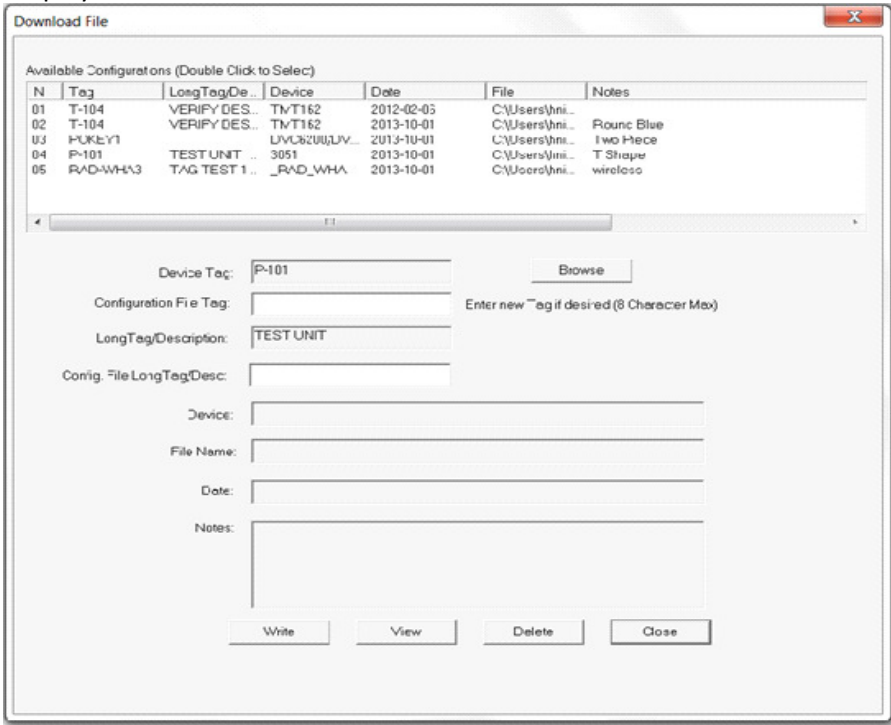
Step	Action
6	<p>If the filename has already been used, the following Dialog Box is displayed when Save Device Config is pressed:</p>  <p>The dialog box titled "File Exists" contains the text "File Exists: Please choose from below:" and three radio button options: "Append 12", "Overwrite", and "Cancel". An "OK" button is at the bottom.</p> <ul style="list-style-type: none"> <li>• <b>Append:</b> Adds the number shown to the end of the file name</li> <li>• <b>Overwrite:</b> Deletes and writes over the existing file</li> <li>• <b>Cancel:</b> Returns to the previous menu</li> </ul>

## 6.9 Download Configuration to Device

Saved configuration files can be downloaded back to devices. This is useful for “Cloning” a device, either for replacement or plant setup.

To save device configurations to disk, perform the following steps:


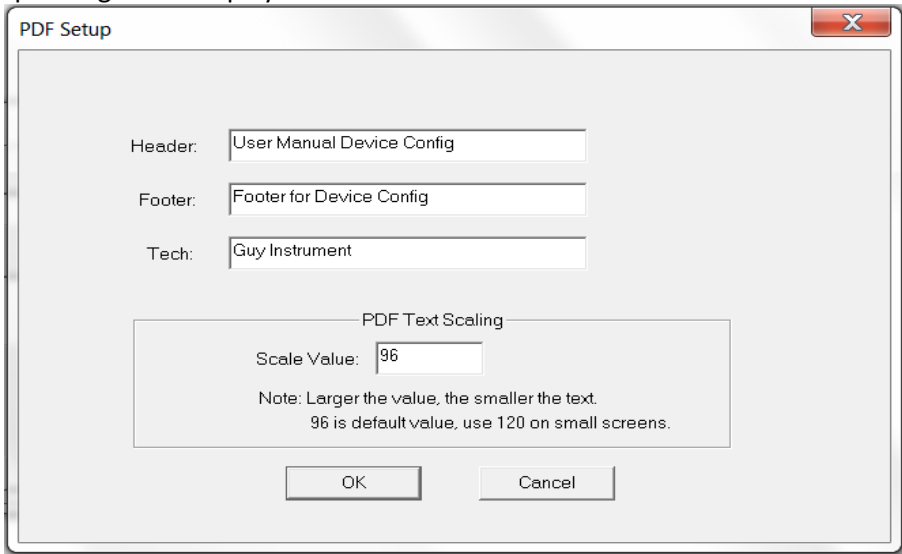
Step	Action																								
1	<div>Ensure that the application is running and communications have been established:</div> <div>The screenshot shows the DevCom2000 Explorer window. The left pane shows a tree view with "Online" expanded, containing "Overview", "Configure", and "Service Tools". The right pane shows a table of device data:<table><thead><tr><th>Item</th><th>Value</th><th>Units</th></tr></thead><tbody><tr><td>Device Status: Good</td><td></td><td></td></tr><tr><td>Comm Status: Burst</td><td></td><td></td></tr><tr><td>Pressure</td><td>2.1</td><td>inH2O</td></tr><tr><td>Analog Output</td><td>11.331</td><td>mA</td></tr><tr><td>Upper Range Value...</td><td>40.0</td><td>inH2O</td></tr><tr><td>Lower Range Value(4 mA)</td><td>-30.0</td><td>inH2O</td></tr><tr><td>Device Information</td><td></td><td></td></tr></tbody></table>The status bar at the bottom shows: Tag: P-101 - LongTag/Desc: TEST UNIT - Device: 3051 - DD: 26/06/03/07. There are also icons for HART Activit and Trend Activit, and a NUM button.</div>	Item	Value	Units	Device Status: Good			Comm Status: Burst			Pressure	2.1	inH2O	Analog Output	11.331	mA	Upper Range Value...	40.0	inH2O	Lower Range Value(4 mA)	-30.0	inH2O	Device Information		
Item	Value	Units																							
Device Status: Good																									
Comm Status: Burst																									
Pressure	2.1	inH2O																							
Analog Output	11.331	mA																							
Upper Range Value...	40.0	inH2O																							
Lower Range Value(4 mA)	-30.0	inH2O																							
Device Information																									

Step	Action
2	<p>Select <b>Device</b> → <b>Download</b> from the main window. The Download Dialog Box is displayed:</p> 
3	<p>The available configurations are displayed. You can sort on each column by clicking it. To get details about a configuration, select the desired configuration and double click it. The details will be displayed below.</p>
4	<p>You can change the desired Tag by editing the Configuration File Tag box. You can change the desired Description by editing the Config. File LongTag/Desc box.</p>
5	<p>Press the “Write” button to write device configuration. The device must be the same type as the configuration file. If they are different, the write operation will be aborted.</p>
6	<p>You can view the PDF file for the configuration file by double clicking on the desired configuration and pressing “View”.</p>
7	<p>You can delete configurations by double clicking on the desired configuration and pressing “Delete”.</p>

## 6.10 Customizing PDF File Output

HART Device configurations can also be saved to disk as PDF Files to document the device. The header, footer, and technician name can be entered to customize the PDF file to make it into a configuration report.

To customize the PDF output, perform the following steps:

Step	Action
1	 <p>Press the “PDF Setup” button on Document Device Dialog Box:</p>
2	<p>The PDF Setup Dialog box is displayed:</p> 
3	Enter data as needed and press OK. The data is saved for future configuration saves.

Step	Action																																																																																							
4	<p>Below is a sample PDF file.</p> <div><div><div>User Manual Device Config</div><div>DevCom2000, Rev 4.6, Device Configuration File</div><div>File: C:\Program Files\ProComSoft\DevCom2000\TESTDEV_1-1.pdf Tag: TESTDEV LongTag/Desc: DEV DESC HERE Device ID: 1 DD: 26/19/01/08 Date (yyyy-mm-dd): 2011-02-17 Time (hr-mn-sec): 03:58:57 PM Tech: Guy Instrument Notes: this is a saved device config</div><table><thead><tr><th>Label</th><th>Value</th><th>Units</th></tr></thead><tbody><tr><td>Xfer fnctn</td><td>Linear</td><td></td></tr><tr><td>AO</td><td>0.00</td><td>mA</td></tr><tr><td>AO alrm typ</td><td>Hi</td><td></td></tr><tr><td>Unit</td><td>ohm</td><td></td></tr><tr><td>Term temp unit</td><td>degR</td><td></td></tr><tr><td>% rnge</td><td>0.00</td><td></td></tr><tr><td>Term temp</td><td>0.00</td><td>degC</td></tr><tr><td>Term Upr Rng</td><td>10.00</td><td>degC</td></tr><tr><td>Term Lor Rng</td><td>0.00</td><td>degC</td></tr><tr><td>Term temp USL</td><td>0.00</td><td>degC</td></tr><tr><td>Term temp LSL</td><td>0.00</td><td>degC</td></tr><tr><td>Term temp damp</td><td>0.00</td><td>s</td></tr><tr><td>Diff min span</td><td>0.00</td><td></td></tr><tr><td>Snsr1</td><td>0.00</td><td>ohm</td></tr><tr><td>Snsr1 snsr s/n</td><td>1</td><td></td></tr><tr><td>Snsr1 Upr Rng</td><td>0.00</td><td>ohm</td></tr><tr><td>Snsr1 Lor Rng</td><td>0.00</td><td>ohm</td></tr><tr><td>Snsr1 USL</td><td>0.00</td><td>ohm</td></tr><tr><td>Snsr1 LSL</td><td>0.00</td><td>ohm</td></tr><tr><td>Snsr1 damp</td><td>0.00</td><td>s</td></tr><tr><td>Snsr1 Min Span</td><td>0.00</td><td>ohm</td></tr><tr><td>Snsr 1 Type</td><td>Ohms</td><td></td></tr><tr><td>Snsr 1 Conn</td><td>2 Wire</td><td></td></tr><tr><td>Meter typ</td><td>Eng unit</td><td></td></tr><tr><td>Meter decimal pt</td><td>Floating decimal pt</td><td></td></tr><tr><td>Meter bar graph</td><td>Bar graph off</td><td></td></tr><tr><td>50/60 Hz filter</td><td>60 Hz</td><td></td></tr><tr><td>Snsr 1 Cal Mode</td><td>Factory Trim</td><td></td></tr></tbody></table><div>Footer for Dev ConfigPage 1 of 3</div></div></div>	Label	Value	Units	Xfer fnctn	Linear		AO	0.00	mA	AO alrm typ	Hi		Unit	ohm		Term temp unit	degR		% rnge	0.00		Term temp	0.00	degC	Term Upr Rng	10.00	degC	Term Lor Rng	0.00	degC	Term temp USL	0.00	degC	Term temp LSL	0.00	degC	Term temp damp	0.00	s	Diff min span	0.00		Snsr1	0.00	ohm	Snsr1 snsr s/n	1		Snsr1 Upr Rng	0.00	ohm	Snsr1 Lor Rng	0.00	ohm	Snsr1 USL	0.00	ohm	Snsr1 LSL	0.00	ohm	Snsr1 damp	0.00	s	Snsr1 Min Span	0.00	ohm	Snsr 1 Type	Ohms		Snsr 1 Conn	2 Wire		Meter typ	Eng unit		Meter decimal pt	Floating decimal pt		Meter bar graph	Bar graph off		50/60 Hz filter	60 Hz		Snsr 1 Cal Mode	Factory Trim	
Label	Value	Units																																																																																						
Xfer fnctn	Linear																																																																																							
AO	0.00	mA																																																																																						
AO alrm typ	Hi																																																																																							
Unit	ohm																																																																																							
Term temp unit	degR																																																																																							
% rnge	0.00																																																																																							
Term temp	0.00	degC																																																																																						
Term Upr Rng	10.00	degC																																																																																						
Term Lor Rng	0.00	degC																																																																																						
Term temp USL	0.00	degC																																																																																						
Term temp LSL	0.00	degC																																																																																						
Term temp damp	0.00	s																																																																																						
Diff min span	0.00																																																																																							
Snsr1	0.00	ohm																																																																																						
Snsr1 snsr s/n	1																																																																																							
Snsr1 Upr Rng	0.00	ohm																																																																																						
Snsr1 Lor Rng	0.00	ohm																																																																																						
Snsr1 USL	0.00	ohm																																																																																						
Snsr1 LSL	0.00	ohm																																																																																						
Snsr1 damp	0.00	s																																																																																						
Snsr1 Min Span	0.00	ohm																																																																																						
Snsr 1 Type	Ohms																																																																																							
Snsr 1 Conn	2 Wire																																																																																							
Meter typ	Eng unit																																																																																							
Meter decimal pt	Floating decimal pt																																																																																							
Meter bar graph	Bar graph off																																																																																							
50/60 Hz filter	60 Hz																																																																																							
Snsr 1 Cal Mode	Factory Trim																																																																																							

## 6.11 License File Transfers

The license file can be transferred easily to other computers. The process is a “Check-In/Check-Out” process. When a license is on the computer, it is considered “Checked-Out”. When the license is on the license server, it is considered “Checked-In”. When the license is “Checked-in”, it can be “Checked-Out” by other users. This enables the license to be shared by many users.

### 6.11.1 Check-In

To Check-In the license from the current computer to the License Server, perform the following steps:

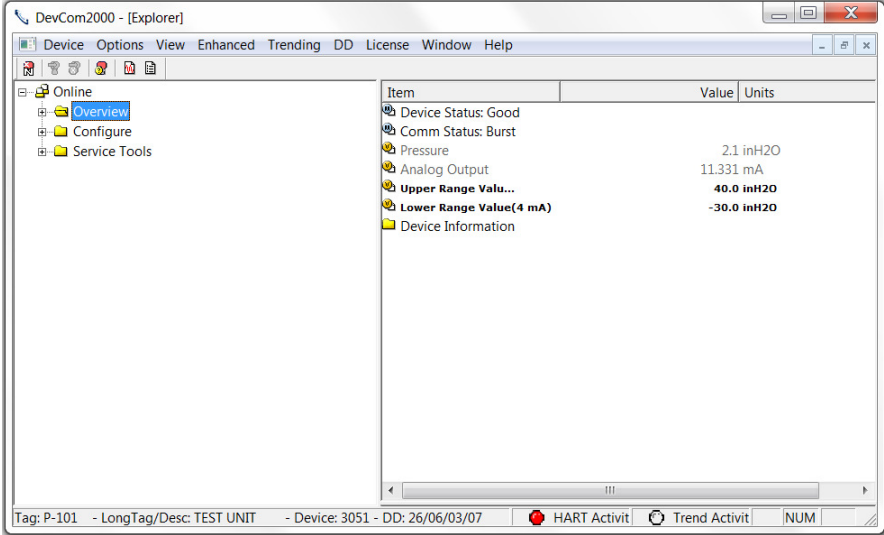
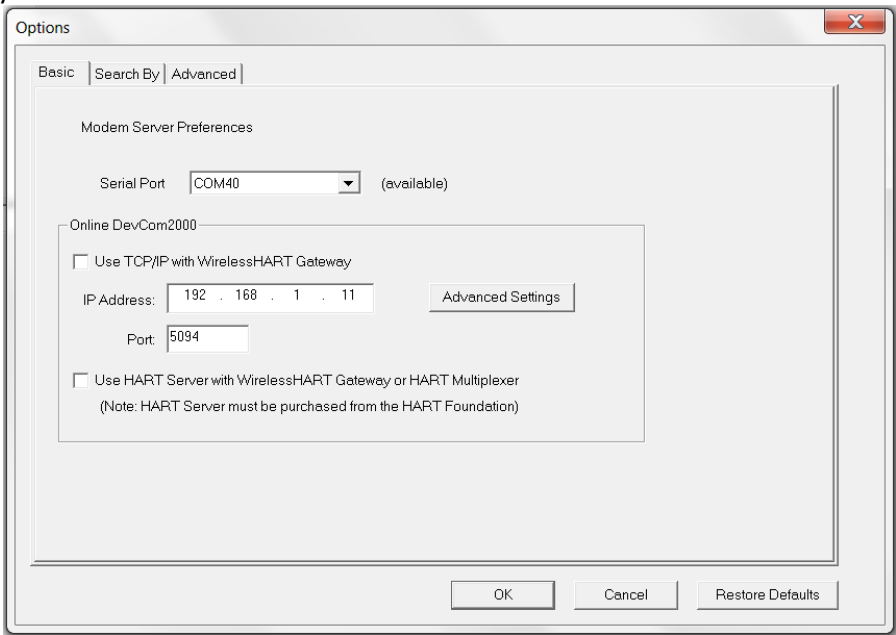
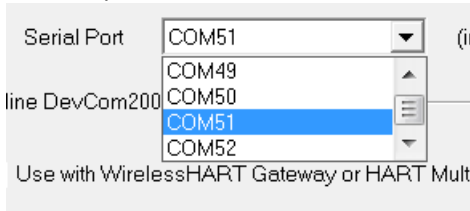
Step	Action
1	Verify your PC is connected to the Internet.
2	<p>Select “Check-In” from the “License” Menu.</p> <p>If the current computer is not licensed, an error message will appear. If licensed, the program will contact the License Server via the internet. It will check-in the license using the License ID and Password used in Activation. The current computer will then become un-activated.</p>

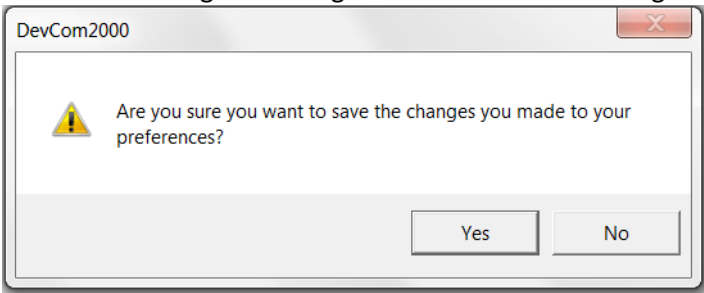
## 6.12 Options Menu

### 6.12.1 Options → Basic

#### 6.12.1.1 Changing the COM port

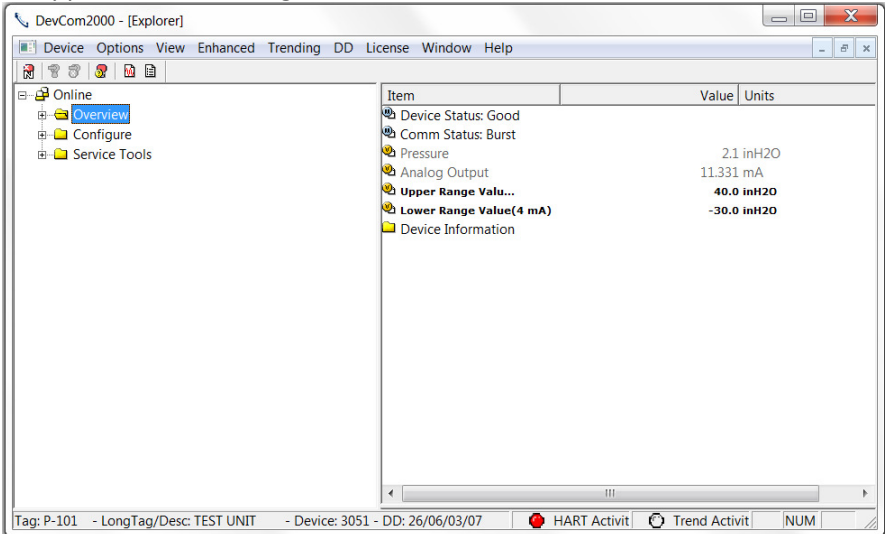
The **Basic** menu is used to set the COM port to the correct one that the device is connected to. To change the COM port, perform the following steps:

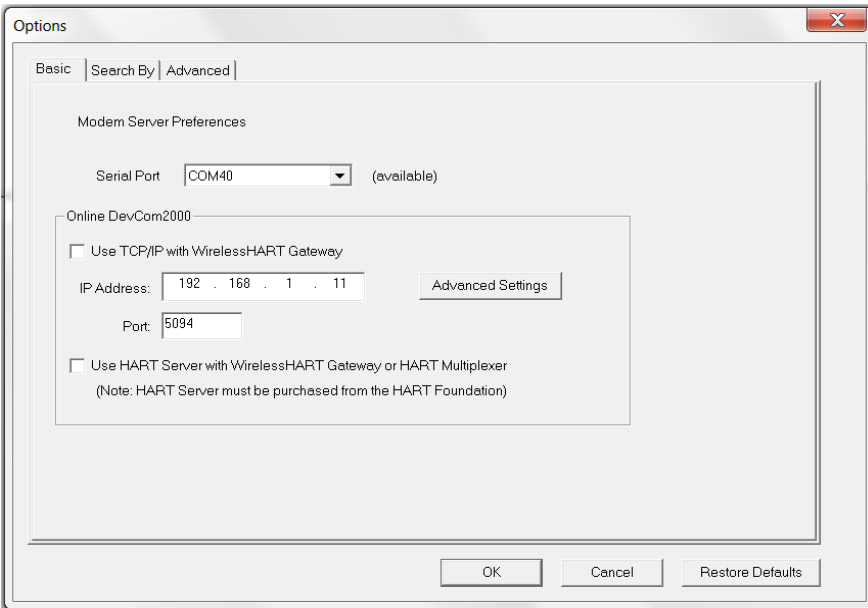
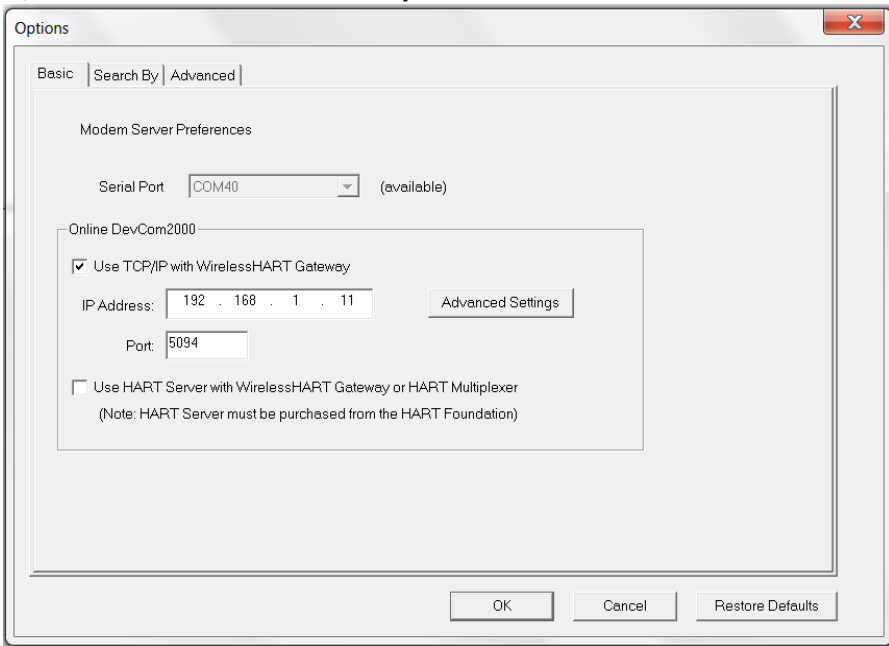
Step	Action
1	<p>Ensure that the application is running.</p> 
2	<p>Select <b>Options → Basic</b> from the main window. The Options Dialog Box is displayed with the Basic tab selected:</p> 
3	<p>To change serial ports, Click on the drop down box:</p> 

Step	Action
4	Once the desired COM port is selected click OK to save the changed settings.
5	Click Yes if you want to save the changes. Clicking No will not save the changes. 
6	Select New Device from the Main screen to connect using the new COM port.

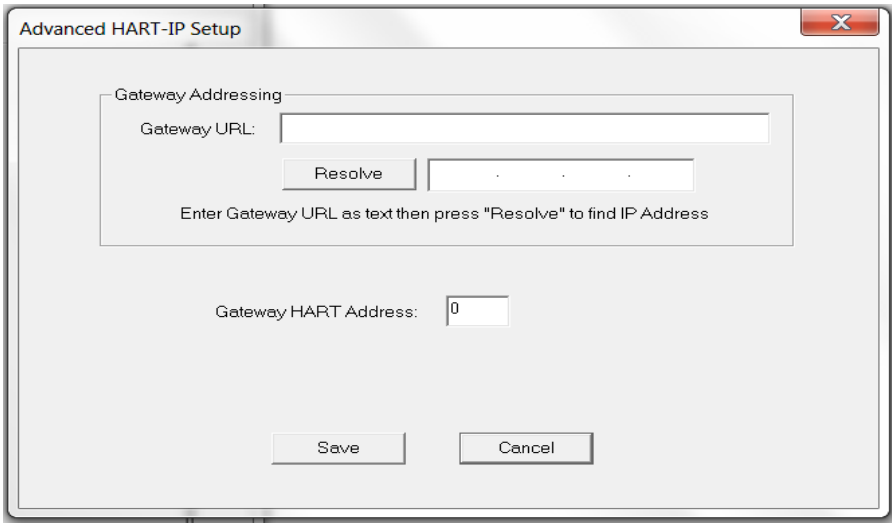
#### 6.12.1.2 Use HART-IP with a *WirelessHART* Gateway

The **Basic** menu is where DevCom2000 can be set to use HART-IP to communicate with a *WirelessHART* Gateway. To communicate using HART-IP with *WirelessHART* Gateway, perform the following steps:

Step	Action
1	Ensure that the application is running. 

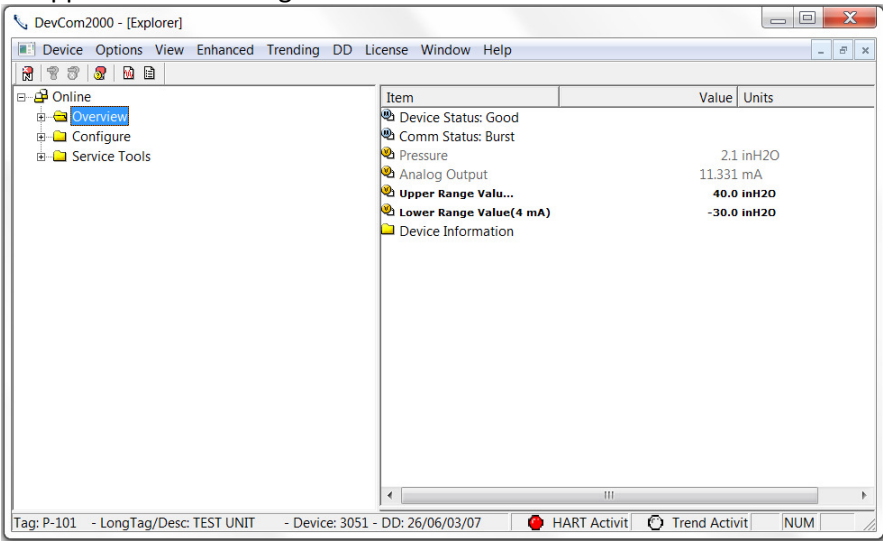
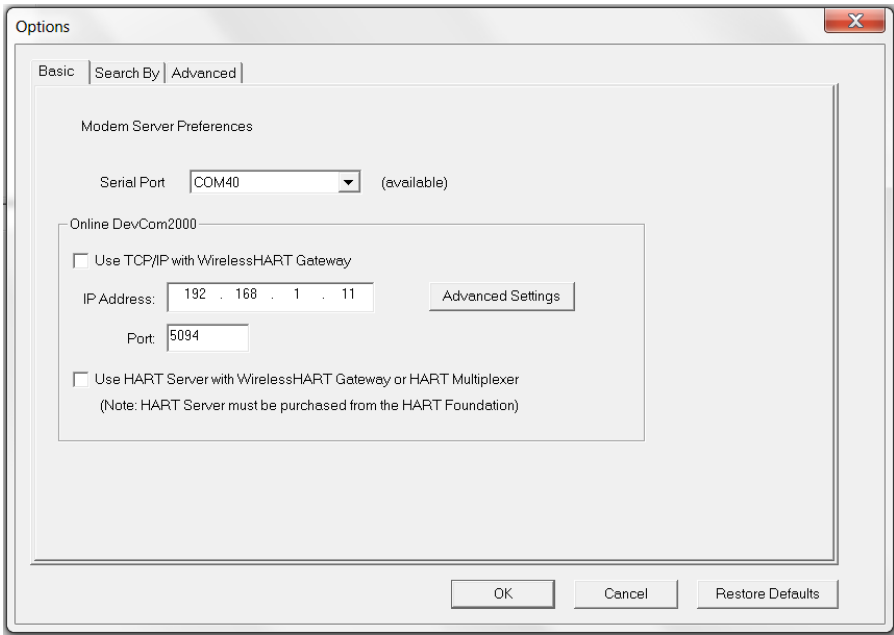
Step	Action
2	<p>Select <b>Options</b> → <b>Basic</b> from the main window. The Options Dialog Box is displayed with the Basic tab selected:</p> 
3	<p>Click “<b>Use TCP/IP with WirelessHART Gateway</b>”</p>  <p>The Serial Port option will now be grayed out. Un-checking will make Serial Port selectable again.</p>
4	<p>Enter the IP Address of the <i>WirelessHART</i> Gateway in the IP Address Field. Also enter the Port assigned to HART-IP in the Gateway. It is typically 5094.</p>

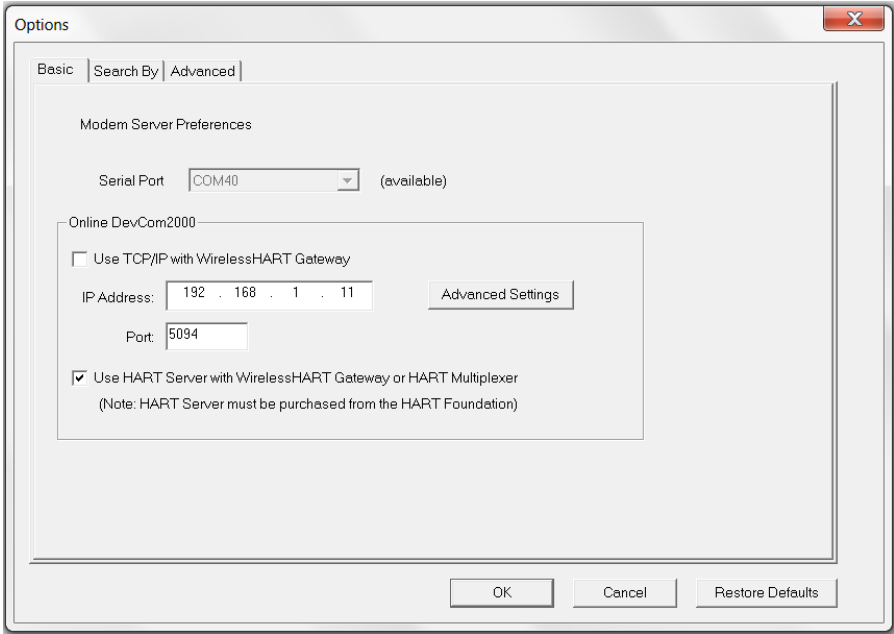
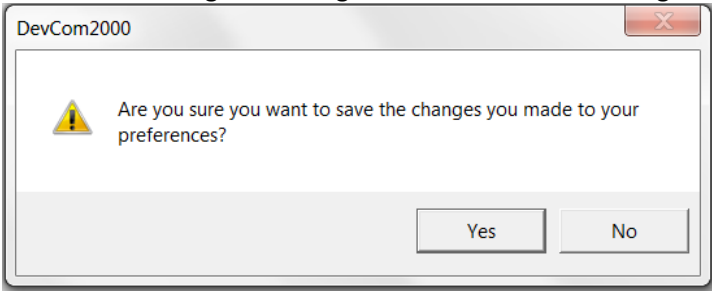


Step	Action
5	<p>For more advanced settings related to HART-IP, click the “Advanced” tab. The following dialog box appears:</p>  <p><b>Communicating to a <i>WirelessHART</i> Gateway via its URL:</b></p> <p><b>Gateway URL</b> Enter a URL text address in the URL field and click the “Resolve” button to convert it into an IP Address. The IP Address will populate the IP Address box if a successful conversion occurs.</p> <p><b>Gateway HART Address</b> Some <i>WirelessHART</i> Gateways do not use the default address of 0. For these Gateways you must enter the correct Gateway Address in this field.</p>

#### 6.12.1.3 Using HART Server

The **Basic** menu is used to set DevCom2000 to communicate with a *WirelessHART* gateway or HART multiplexer. This requires an external program called HART Server. Although DevCom2000 can use HART Server for *WirelessHART* communications, it is recommended that HART-IP be used. To communicate with a *WirelessHART* Gateway or a HART multiplexer, perform the following steps:

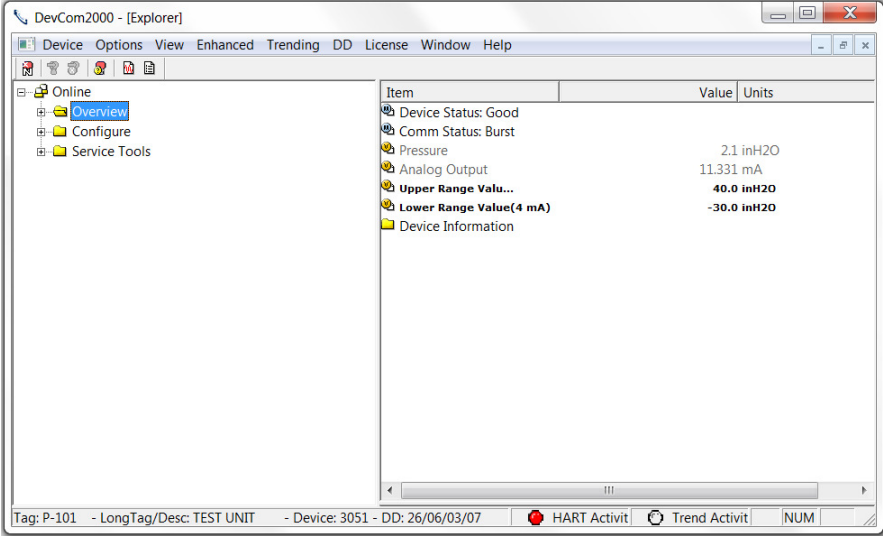
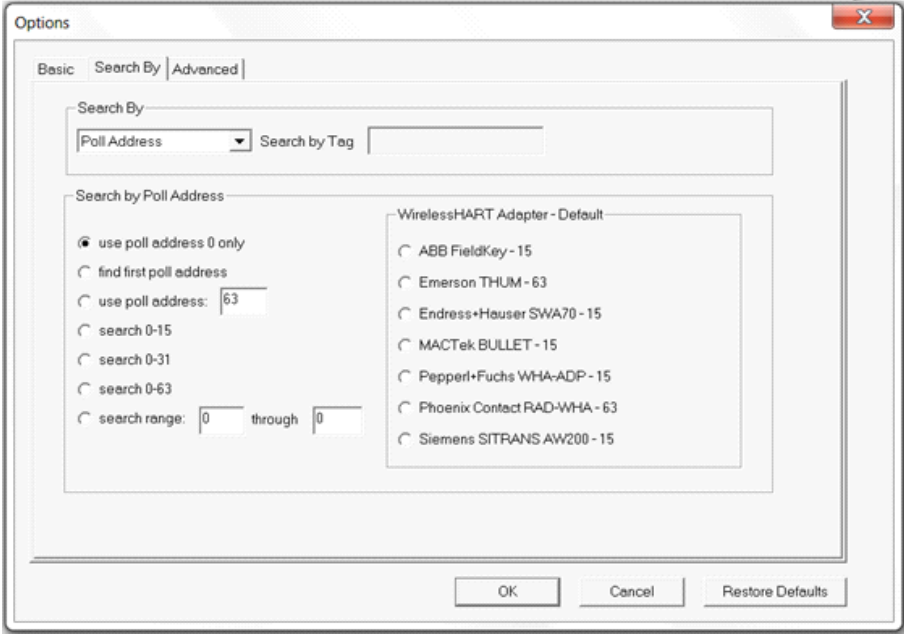
Step	Action
1	<p>Ensure that the application is running.</p> 
2	<p>Select <b>Options</b> → <b>Basic</b> from the main window. The Options Dialog Box is displayed with the Basic tab selected:</p> 

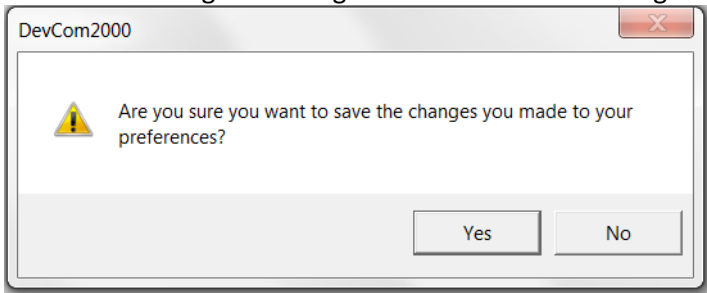
Step	Action
3	<p>Click “Use HART server with <i>WirelessHART</i> Gateway or HART Multiplexer”</p> 
4	<p>The Serial Port option will now be grayed out. Un-checking will make Serial Port selectable again. Click OK to save the changed settings.</p>
5	<p>Click Yes if you want to save the changes. Clicking No will not save the changes.</p> 
6	<p>Restart DevCom2000 for the changes to take place.</p>

### 6.12.3 Options → Search

#### 6.12.3.1 Poll Address

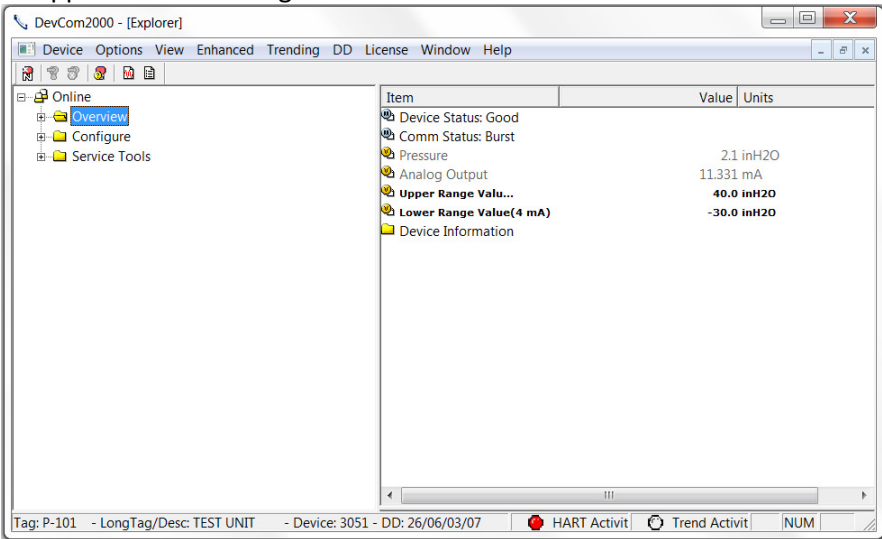
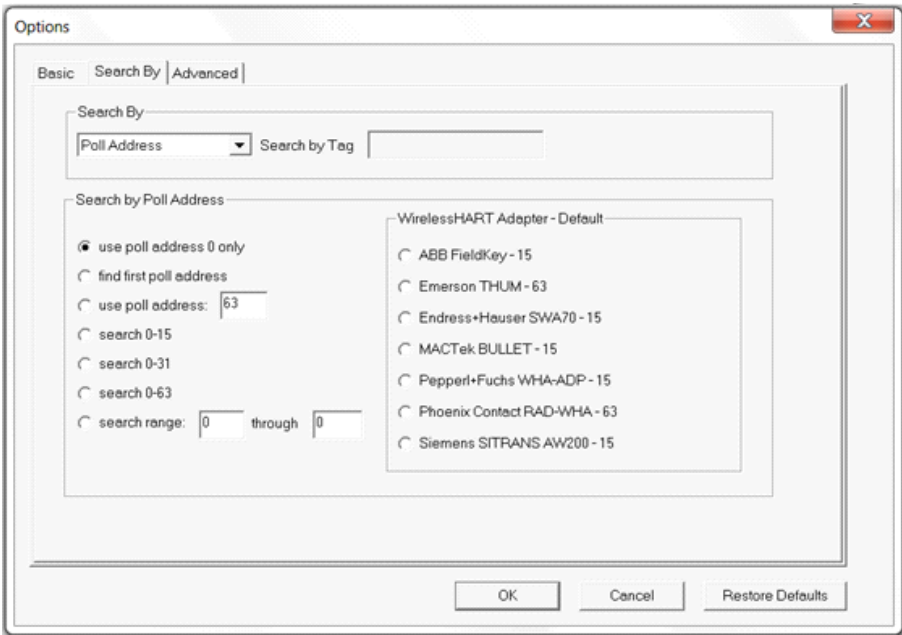
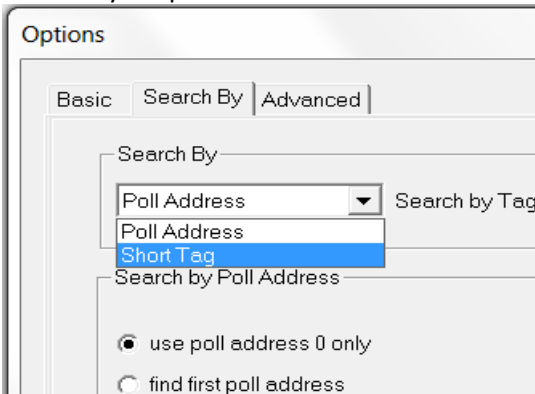
The **Search** menu is used to change how DevCom2000 searches for a Device. The first option is to search by Poll Address. This searches for a specific poll address or set of addresses. To search for a device using Poll Address perform these steps:

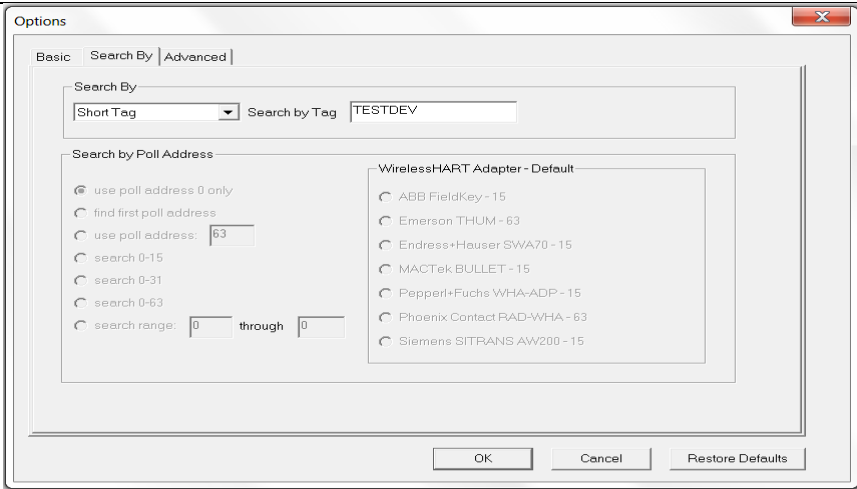
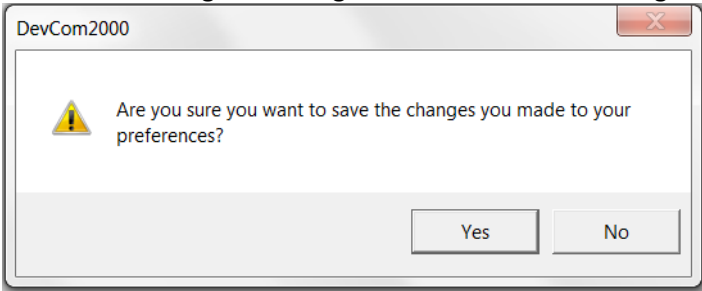
Step	Action
1	<p>Ensure that the application is running.</p> 
2	<p>Select <b>Options</b> → <b>Search</b> from the main window. The Options Dialog Box is displayed with the Search By tab selected:</p> 

Step	Action
3	<p>Select one of options for Poll address:</p> <ul style="list-style-type: none"> <li>• “use poll address 0 only” only searches at poll address 0 before not finding a device. This is the default setting.</li> <li>• “find first poll address” searches poll addresses until it finds the first device it comes across.</li> <li>• “use poll address:___” If the poll address is know this options searches at a specific address (i.e. 5).</li> <li>• “search 0-15” searches poll addresses 0 through 15.</li> <li>• “search 0-31” searches poll addresses 0 through 31.</li> <li>• “search 0-63” searches poll addresses 0 through 63</li> <li>• “search range__ through__” searches between a user identified range of poll addresses.</li> </ul> <p>If using a <i>WirelessHART</i> adapter you can also click to select the devices default address, e.g.:</p> <ul style="list-style-type: none"> <li>• “MACTek Bullet – 15” searches poll address 15.</li> <li>• “Emerson THUM - 63” searches poll address 63.</li> <li>• Etc.</li> </ul>
4	The Search by Tag option is grayed out when searching by poll address is selected. Select a search by poll address option and Click OK to save the changed settings.
5	<p>Click Yes if you want to save the changes. Clicking No will not save the changes.</p> 
6	Reconnect to a new device.

#### 6.12.3.2 Short Tag

The **Search** menu can also be used to search by a specific Tag name or Description. To search for a device based on a Tag name or a Description, perform the following steps:

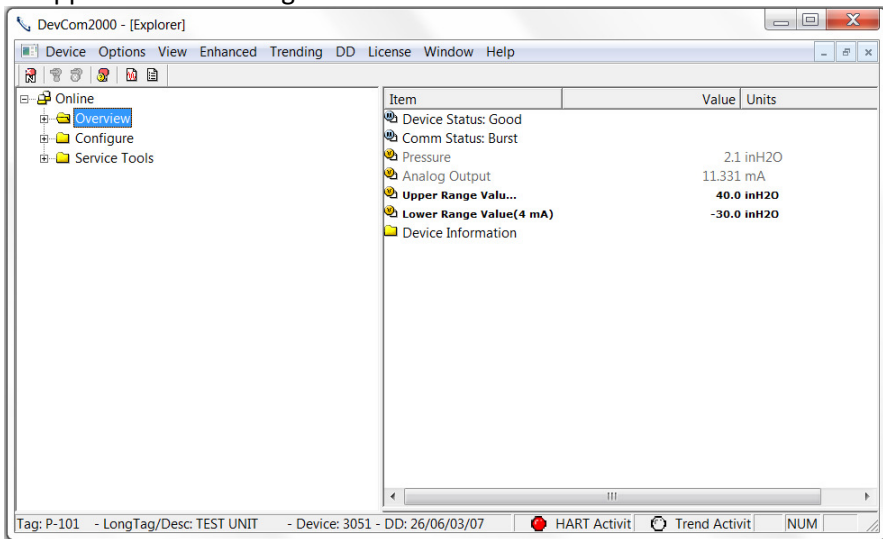
Step	Action
1	<p>Ensure that the application is running.</p> 
2	<p>Select <b>Options</b> → <b>Search</b> from the main window. The Options Dialog Box is displayed with the Search By tab selected:</p> 
3	<p>Select "Short Tag" from the Search By drop down box.</p> 
4	<p>The poll address options will now be grayed out. Enter the tag to be searched for in the "Search by Tag" edit box.</p>

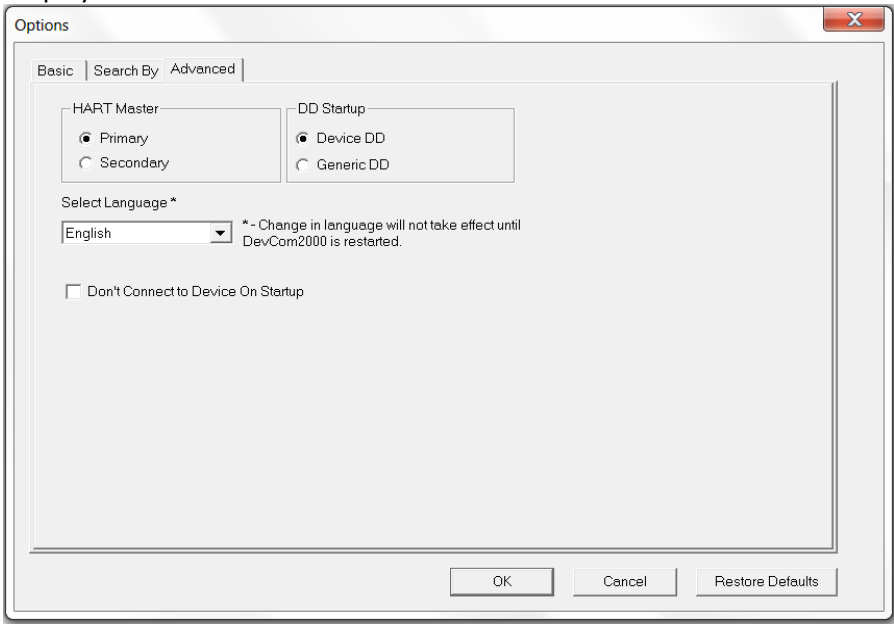
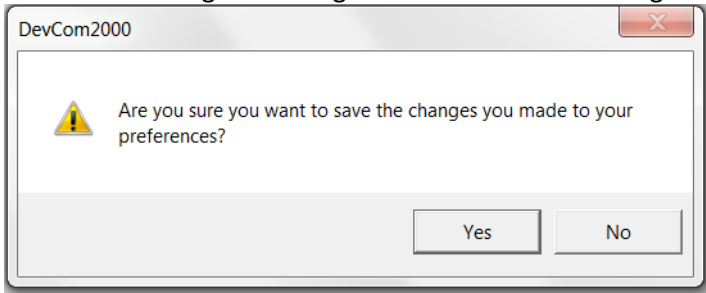
Step	Action
	
5	Click <b>OK</b> to save the changed settings.
6	Click <b>Yes</b> if you want to save the changes. Clicking <b>No</b> will not save the changes.
	
7	Reconnect to a new device.

#### 6.12.4 Options → Advanced

##### 6.12.4.1 HART Master

The **Advanced** menu is used to change DevCom2000 settings. DevCom2000 can be a Primary or Secondary HART Master. To change the HART Master setting, perform the following steps:

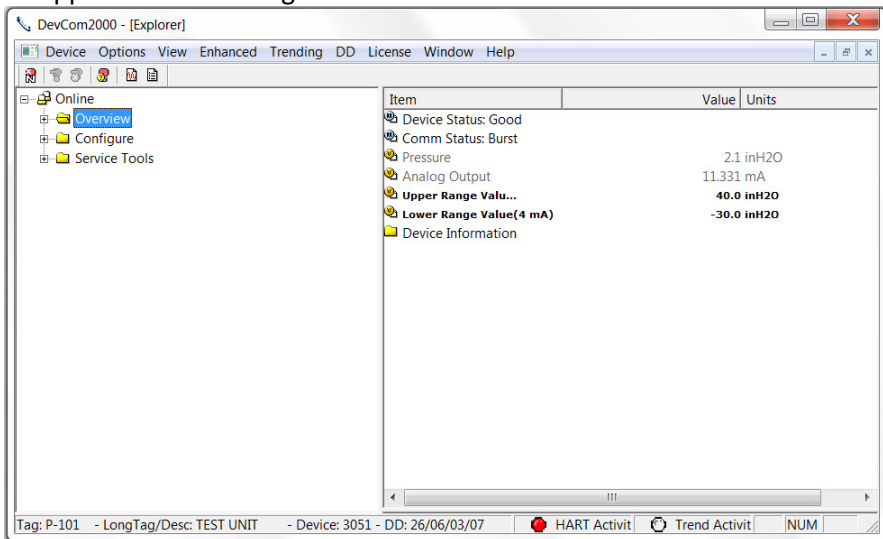
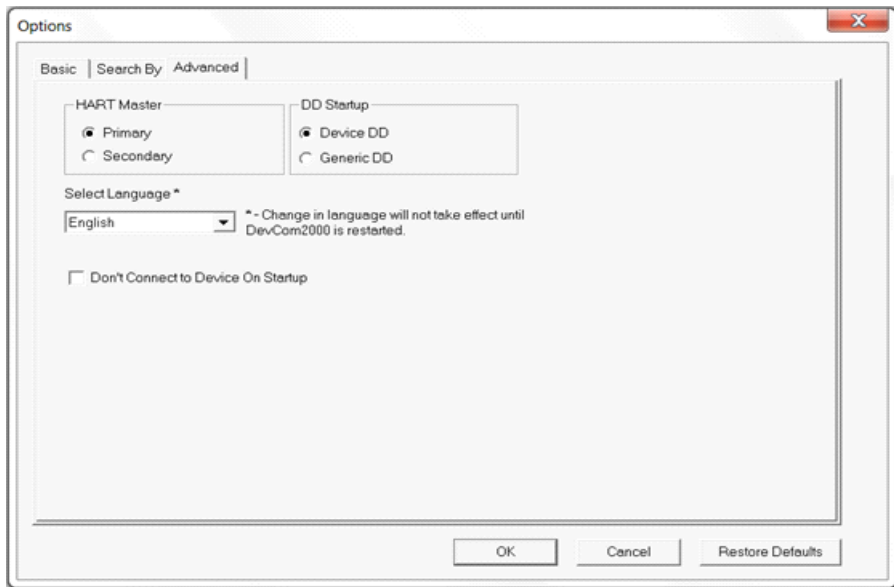
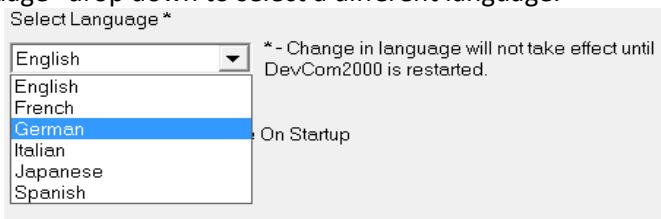
Step	Action
1	<p>Ensure that the application is running.</p> 

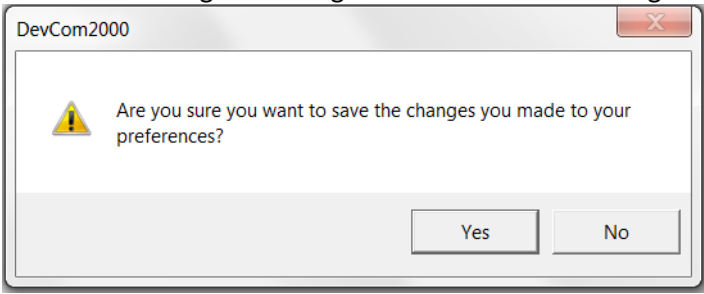
Step	Action
2	<p>Select <b>Options</b> → <b>Advanced</b> from the main window. The Options Dialog Box is displayed with the Advanced tab selected:</p> 
3	Under the section “HART Master” select either “Primary” or “Secondary”.
4	Click OK to save the changed settings.
5	<p>Click Yes if you want to save the changes. Clicking no will not save the changes.</p> 
6	Restart DevCom2000 for the changes to take place.

#### 6.12.4.2 Language

Certain DD's can be used in different languages. English is the default setting but some support other languages. Note that main program frame will always be English. Only the DD based items – menus, variables, etc. will change language. And will only change if the DD supports that language. In order to change the Language setting, perform the following steps:

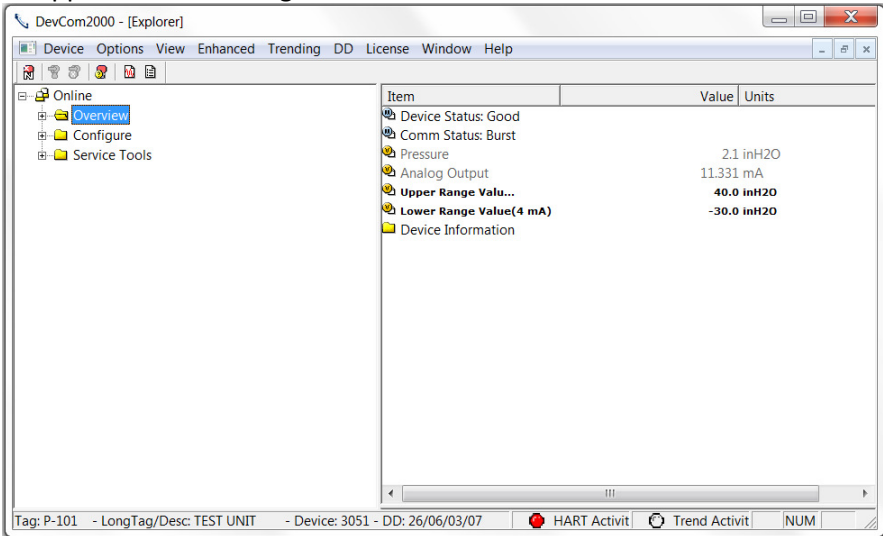


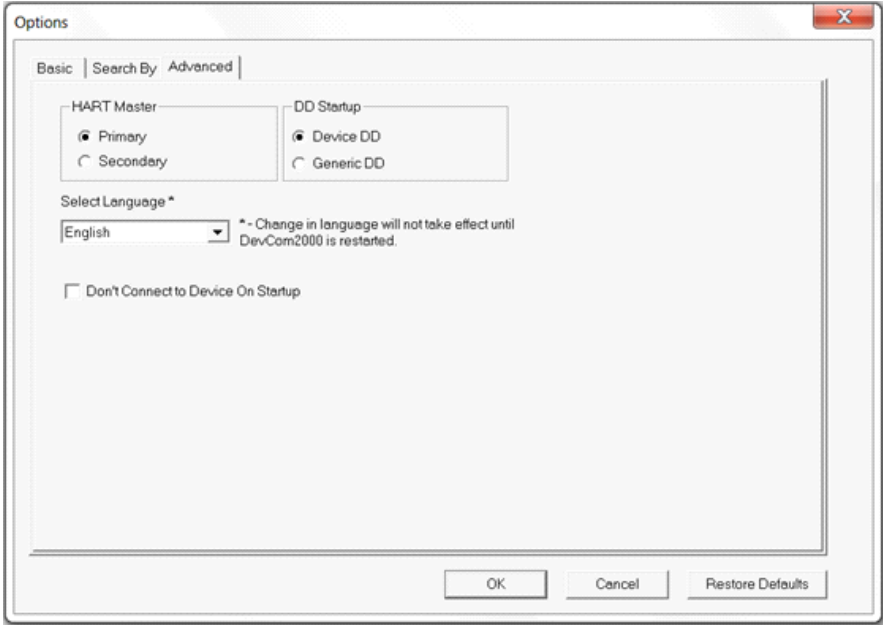
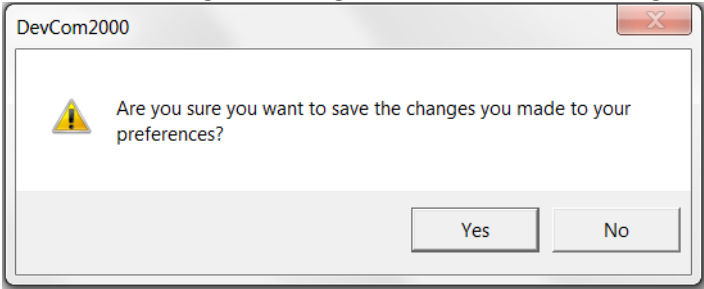
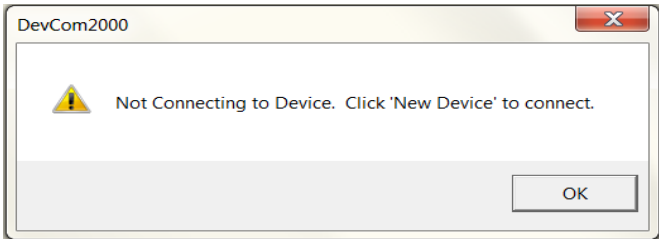
Step	Action
1	<p>Ensure that the application is running.</p> 
2	<p>Select <b>Options</b> → <b>Advanced</b> from the main window. The Options Dialog Box is displayed with the Advanced tab selected:</p> 
3	<p>Click the “Select Language” drop down to select a different language.</p> 
4	<p>Select a language to translate the DD into. Click Okay to save the changed settings.</p>

Step	Action
5	Click Yes if you want to save the changes. Clicking no will not save the changes. 
6	Restart DevCom2000 for the changes to take place. If the language is supported the DD will be translated. If not, the DD will default to English.

#### 6.12.4.3 DD Startup

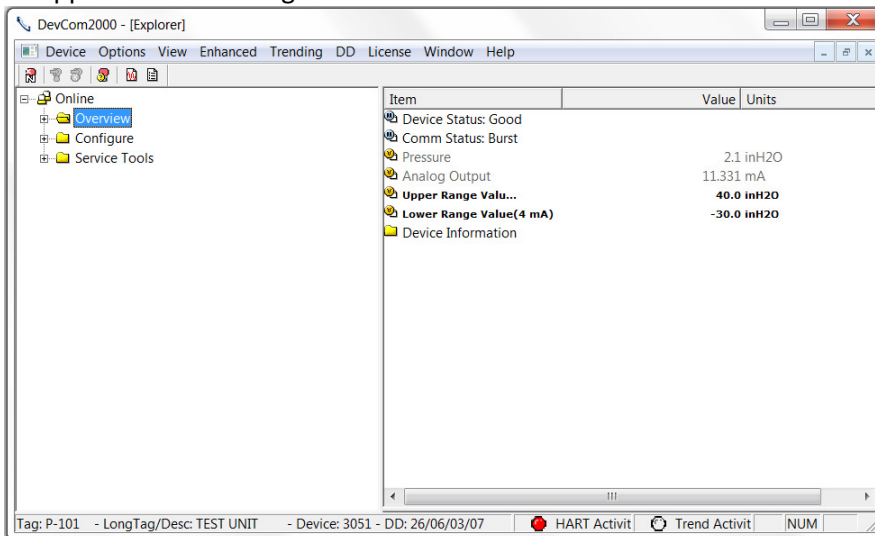
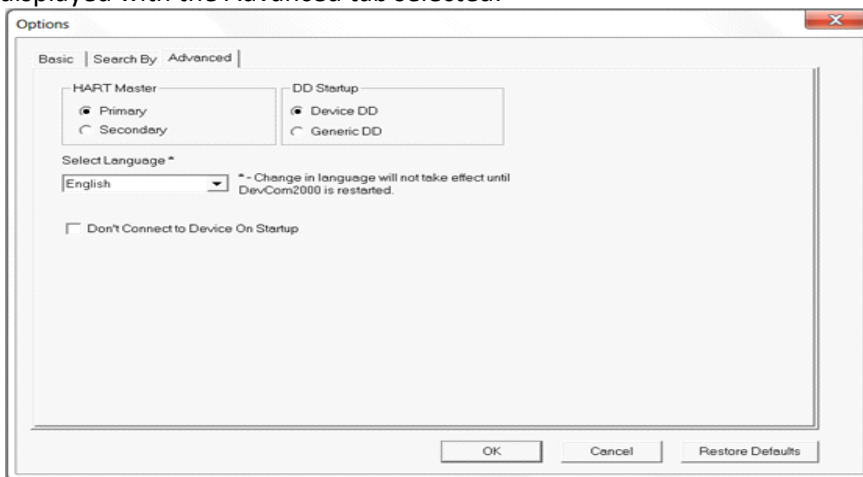
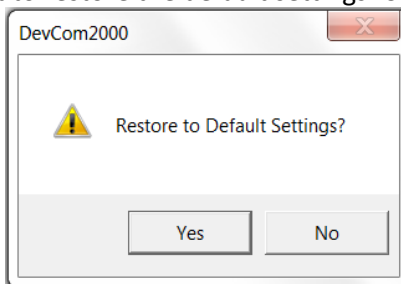
During normal startup of DevCom2000, the device is found and then the DD is loaded. If the DD cannot be found then a generic DD is loaded. Advanced has settings that can change what DD DevCom2000 loads with loading a device. To load a generic DD at start up or to not load a DD at all perform the following steps:

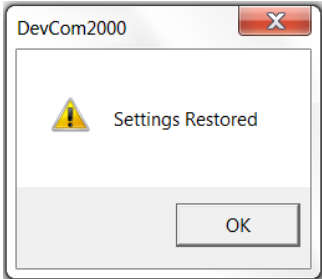
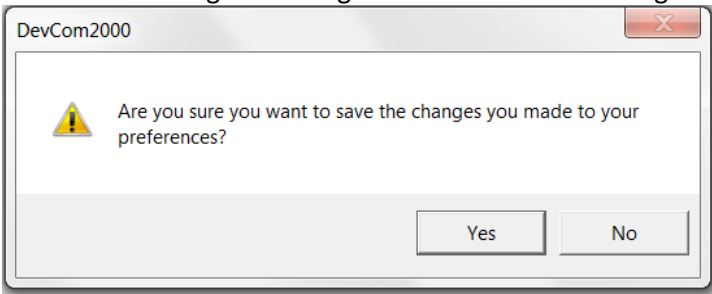
Step	Action
1	Ensure that the application is running. 

Step	Action
2	<p>Select <b>Options</b> → <b>Advanced</b> from the main window. The Options Dialog Box is displayed with the Advanced tab selected:</p> 
3	Click either “Device DD” or “Generic DD” depending on which DD is to be loaded when connecting to a device.
4	Check the “Don’t Connect to Device On Startup” to start DevCom2000 without connecting to a device. Clicking “New Device” will connect to a device after this start up.
5	Click <b>OK</b> to save the changed settings.
6	<p>Click <b>Yes</b> if you want to save the changes. Clicking no will not save the changes.</p> 
7	Restart DevCom2000 for the changes to take place.
8	<p>If “Don’t Connect to Device On Startup” is checked the following message will be displayed on start up:</p> 

#### 6.12.4.4 Default Settings

The “Default” button on the **Advanced** tab **Options** resets all the advanced options to their default settings. To return the settings to their default settings perform the following steps:

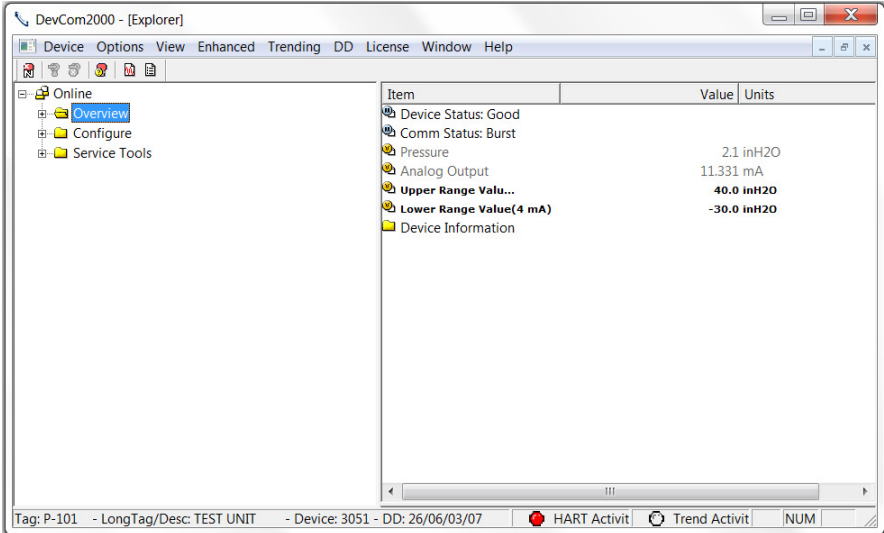
Step	Action
1	<p>Ensure that the application is running.</p> 
2	<p>Select <b>Options</b> → <b>Advanced</b> from the main window. The Options Dialog Box is displayed with the Advanced tab selected:</p> 
3	<p>Click the “Restore Defaults” button.</p>
4	<p>DevCom2000 will ask if you want to restore the default settings. Click “Yes”</p> 

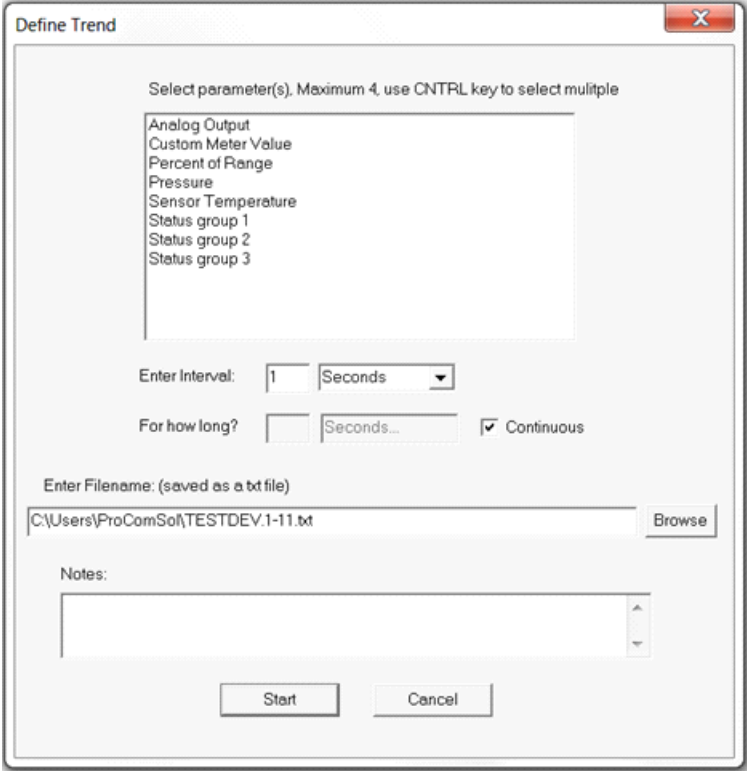
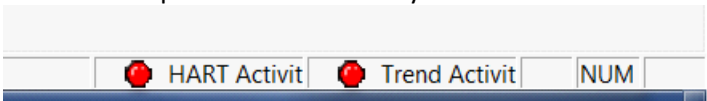
Step	Action
5	<p>If the restore was successful the following dialog box will be shown:</p> 
6	Click <b>OK</b> to save the changed settings.
7	<p>Click <b>Yes</b> if you want to save the changes. Clicking no will not save the changes.</p> 
8	Restart DevCom2000 for the changes to take place.

## 6.13 Trending

### 6.13.1 Define Trend

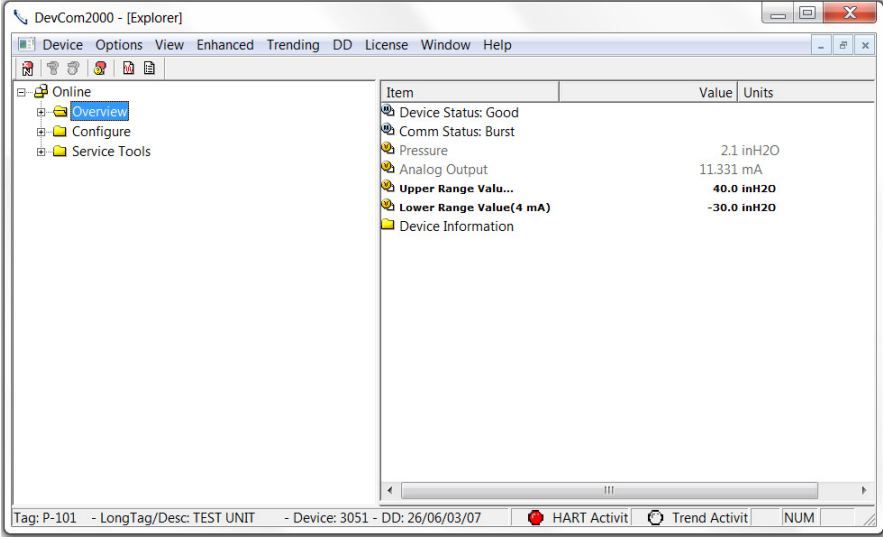
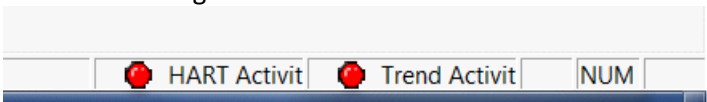
The **Trending** menu is used to track dynamic device parameters over a specified period of time. Once a parameter is tracked, it can be graphed and compared against other parameters tracked on the same time period. Before a parameter can be graphed, a trend must first be created. To create a trend, perform the following steps:

Step	Action
1	<p>Ensure that the application is running and is connected to a device.</p> 

Step	Action
2	<p>Select <b>Trending</b> → <b>Define Trend</b> from the main window. The <b>Define Trend</b> Dialog Box is displayed:</p> 
3	<p>Select the information for the log file:</p> <ul style="list-style-type: none"> <li>• <b>Select Parameter(s)</b> – Select up to four parameters to log at a time. Press the CNTRL key to select multiple parameters.</li> <li>• <b>Enter Interval</b> - Input a number and select an interval from the drop down box, i.e. Seconds, Minutes, Hours, Days.</li> <li>• <b>For How Long?</b> – Input duration for how long to log the parameter(s). This part will be grayed out if the “Continuous” check box is selected. Unselect it for a finite duration.</li> <li>• <b>Enter Filename</b> – The default directory is based on Windows User Accounts however a log file can be saved anywhere.</li> <li>• <b>Notes</b> – The section can only be 250 characters long.</li> </ul>
4	Click the “Start” button to start logging.
5	<p>The logging will then be started. At the lower right hand corner of DevCom2000 the “Trend Activity” light will come on. This indicates that there is logging going on. You cannot start another log until this one is finished or the user stops the trend manually.</p> 

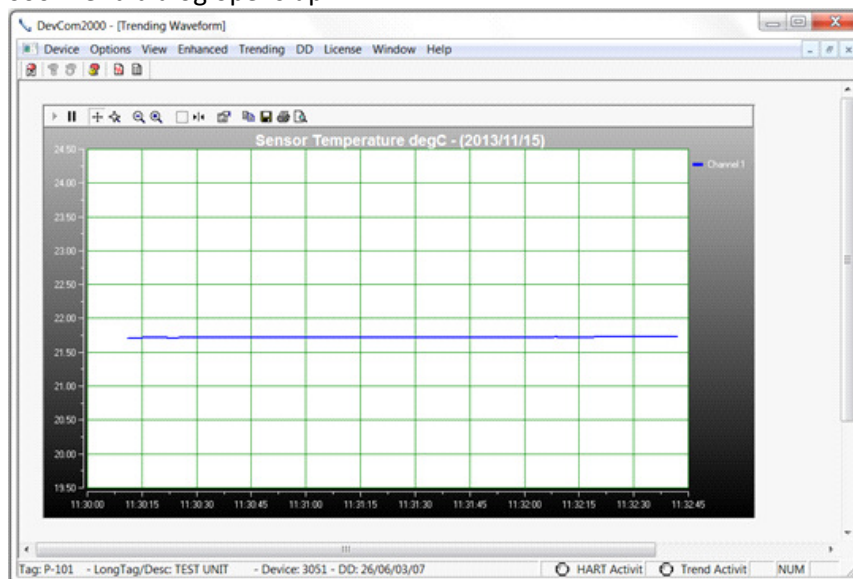
### 6.13.2 View Current Trend

When a trend is created DevCom2000 creates a window that shows the graph of the current trend. To view this trend, perform the following steps:

Step	Action
1	<p>Ensure that the application is running and is connected to a device.</p> 
2	<p>Ensure that a trend is in progress. The “Trend Activity” light at the bottom of the screen is on if a trend is in progress. If not then the light will be off.</p> 
3	<p>Select <b>Trending</b> → <b>View</b> Current Trend from the main window.</p>

4



The DevCom2000 Trend dialog opens up.





The user can manipulate the graph as desired. “Tracking” is the term used to describe how the graph control follows the data, changing the axis in real time so that all of the data is shown. Below are the specific parts of the graph:


**Tool Bar:** There are multiple things that the user can do with the graph.





**Resume All Tracking:** The “Resume All” button -  - is grayed out while tracking. If either axis is changed or the “Pause” button is pressed, this will become green -  - Pressing “Resume All Tracking” will resume the tracking on the graph.


**Pause All Tracking:** The “Pause” button -  - pauses the graph in its current state. Data is still added, however the current X-axis and Y-axis spans no longer change. Pressing the “Resume” button will continue tracking.


**Scroll Axis:** This is the default way to scroll both the X and Y-axis. The “Scroll Axis” button -  - allows the user to scroll in both directions on the graph.

**Zoom Axis:** The “Zoom Axis” button -  - allows the user to shrink or enlarge the scale of either axis. By moving up or down, left or right, the span of each axis is changed.






**Zoom Out All Axis:** The “Zoom Out All Axis” button -  - zooms out both the X-axis and Y-axis at the same time giving the user a broader look at the graph.

**Zoom In All Axis:** The “Zoom In All Axis” button -  - zooms in both the X-axis and Y-axis at the same time giving the user view over a smaller time period.

**Zoom Box:** The “Zoom Box” button -  - changes the cursor allowing the user to select a specific area of the graph to zoom in on for a more detailed look.

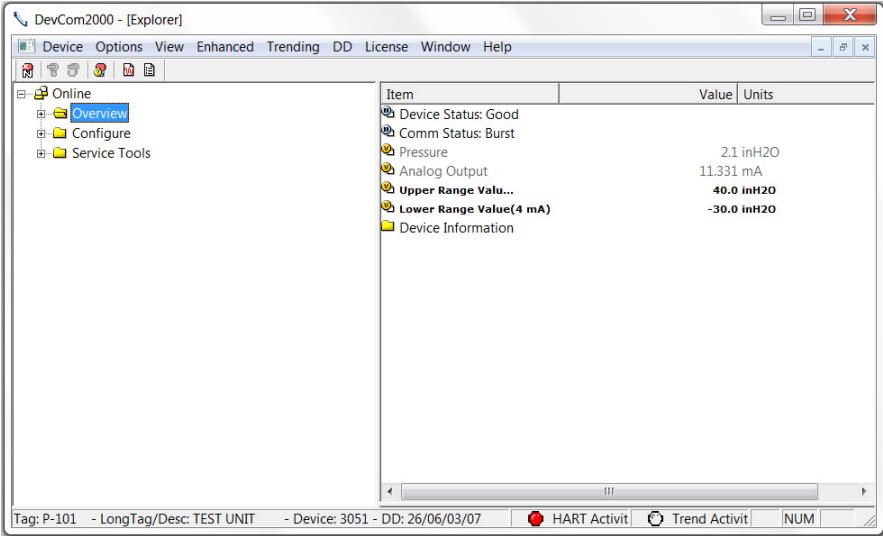
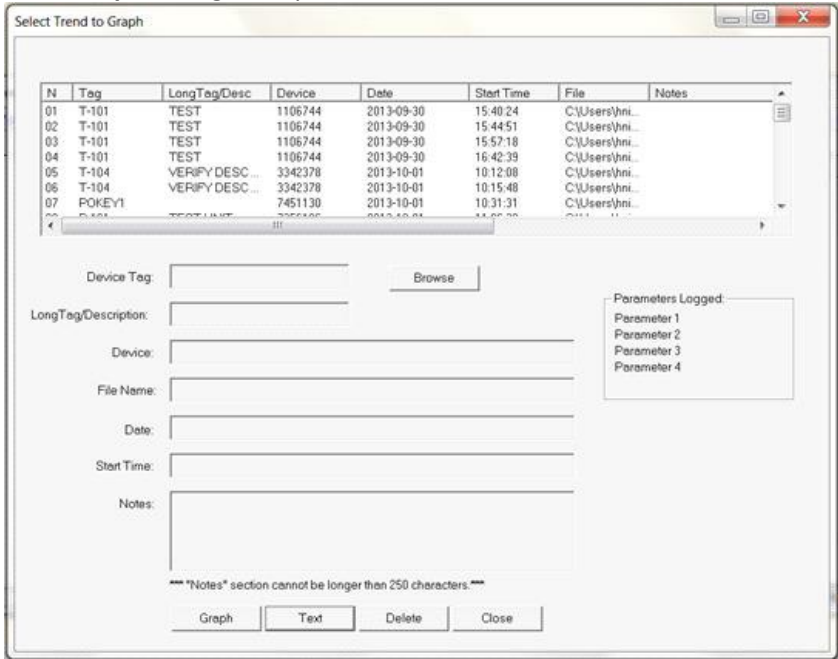
**Cursor:** The “Cursor” button -  - adds a cursor to the screen that gives the coordinates of the graph at a certain time. Clicking and moving the cursor can give the coordinates of any point on the graph. See below for an example of using the “Cursor” tool:



Step	Action
	<div data-bbox="619 264 1141 622" data-label="Figure"> </div> <p><b>Properties:</b> The “Properties” button -  - brings up the “Properties” dialog box which gives the user the ability to customize the graph as desired. Below is an example of one of the “Properties” tabs:</p> <div data-bbox="448 741 1313 1149" data-label="Image"> </div> <p><b>Copy To Clipboard:</b> The “Copy To Clipboard” button -  - copies the graph to the clipboard to allow the graph to be pasted into documents like a report.</p> <p><b>Save:</b> The “Save” button -  - saves the graph as a “*.bmp”.</p> <p><b>Print:</b> The “Print” button -  - prints the graph.</p> <p><b>Preview:</b> The “Preview” button -  - gives a print preview of the graph.</p> <p><b>Title:</b> The title gives the name of the parameter being trended, the units that the parameter is being measured in, and the date(s) of the graph, e.g.</p> <div data-bbox="603 1518 1161 1597" data-label="Text"> <p>(Parameter) (Units) - (Date yyyy/mm/dd)  <b>Pressure inH2O - (2011/03/14)</b></p> </div> <p><b>Axis:</b> The Y-axis is the units of the parameter. The X-axis is the time in HH:MM:SS format.</p> <p><b>Redraw:</b> This section is disabled for <b>View Current Trend</b>.</p>

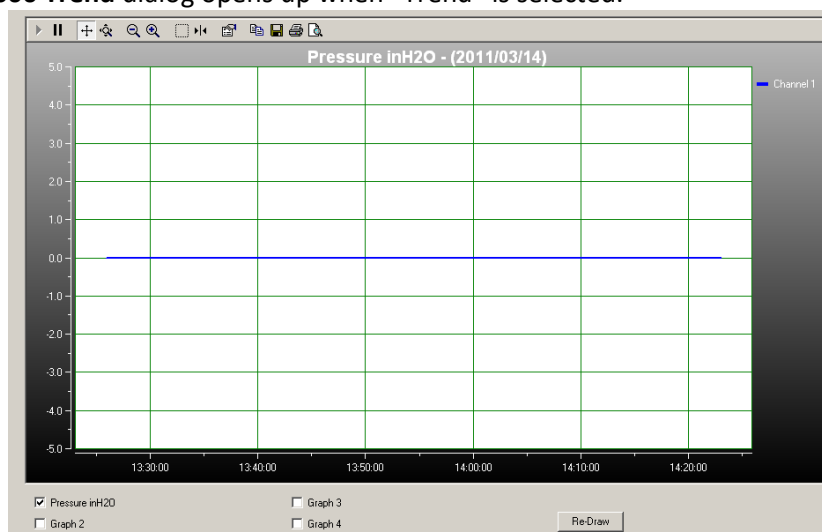
### 6.13.3 View Past Trends

DevCom2000 keeps a list of trends that have been done in the past. These trends are saved so that they can be viewed at a later date. To select a trend to be viewed perform the following steps:

Step	Action
1	<p>Ensure that the application is running, you do not have to be connected to a device to use View Past Trends.</p> 
2	<p>Select <b>Trending</b> → <b>View Past Trends</b> from the main window.</p>
3	<p>The <b>Select Trend To Graph</b> dialog will open.</p>  <p>This dialog box is very similar to the “Download/View” dialog box.</p> <p><b>Data:</b> Opens the text file where the data has been saved.</p> <p><b>Delete:</b> Deletes a previous trend from the database.</p> <p><b>Close:</b> Closes the dialog box.</p> <p><b>Trend:</b> Opens the saved Trend and displays it graphically. Select a trend to graph and click “Trend”.</p>


4



The DevCom2000 Trend dialog opens up when “Trend” is selected.





The user can manipulate the graph as desired. “Tracking” is the term used to describe how the graph control follows the data, changing the axis in real time so that all of the data is shown. Below are the specific parts of the graph:


**Tool Bar:** There are multiple things that the user can do with the graph.





**Resume All Tracking:** The “Resume All” button -  - is grayed out while tracking. If either axis is changed or the “Pause” button is pressed, this will become green -  - Pressing “Resume All Tracking” will resume the tracking on the graph.


**Pause All Tracking:** The “Pause” button -  - pauses the graph in its current state. Data is still added, however the current X-axis and Y-axis spans no longer change. Pressing the “Resume” button will continue tracking.


**Scroll Axis:** This is the default way to scroll both the X and Y-axis. The “Scroll Axis” button -  - allows the user to scroll in both directions on the graph.






**Zoom Axis:** The “Zoom Axis” button -  - allows the user to shrink or enlarge the scale of either axis. By moving up or down, left or right, the span of each axis is changed.

**Zoom Out All Axis:** The “Zoom Out All Axis” button -  - zooms out both the X-axis and Y-axis at the same time giving the user a broader look at the graph.

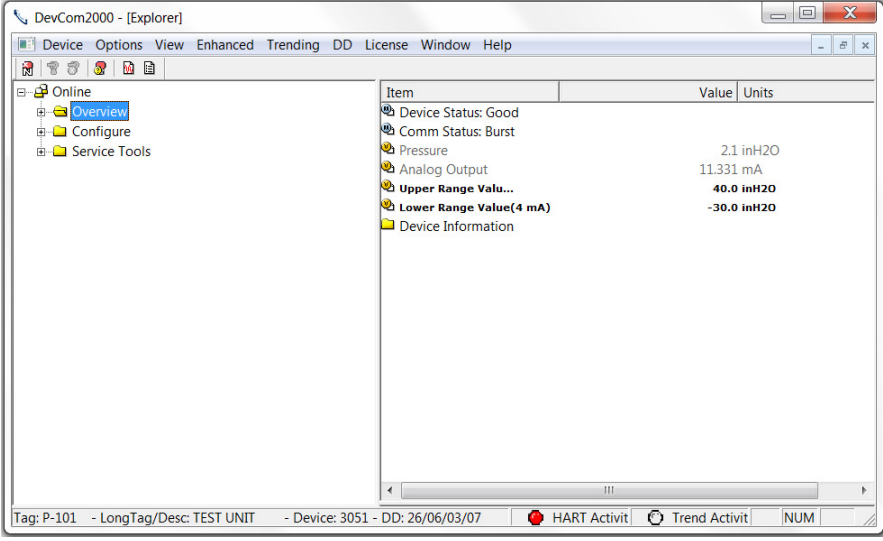
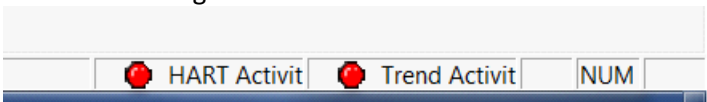
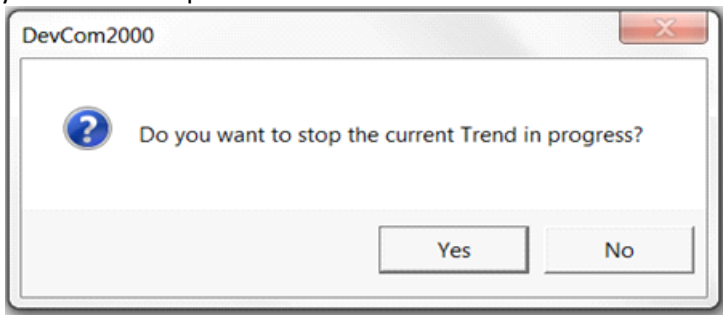

**Zoom In All Axis:** The “Zoom In All Axis” button -  - zooms in both the X-axis and Y-axis at the same time giving the user view over a smaller time period.

**Zoom Box:** The “Zoom Box” button -  - changes the cursor allowing the user to select a specific area of the graph to zoom in on for a more detailed look.

**Cursor:** The “Cursor” button -  - adds a cursor to the screen that gives the coordinates of the graph at a certain time. Clicking and moving the cursor can give the coordinates of any point on the graph. See below for an example of using the “Cursor” tool:

Step	Action				
	<div data-bbox="619 264 1141 622" data-label="Figure"> </div> <p><b>Properties:</b> The “Properties” button -  - brings up the “Properties” dialog box which gives the user the ability to customize the graph as desired. Below is an example of one of the “Properties” tabs:</p> <div data-bbox="448 741 1313 1149" data-label="Image"> </div> <p><b>Copy To Clipboard:</b> The “Copy To Clipboard” button -  - copies the graph to the clipboard to allow the graph to be pasted into documents like a report.</p> <p><b>Save:</b> The “Save” button -  - saves the graph as a “*.bmp”.</p> <p><b>Print:</b> The “Print” button -  - prints the graph.</p> <p><b>Preview:</b> The “Preview” button -  - gives a print preview of the graph.</p> <p><b>Title:</b> The title gives the name of the parameter being trended, the units that the parameter is being measured in, and the date(s) of the graph, e.g.</p> <div data-bbox="603 1525 1161 1597" data-label="Text"> <p>(Parameter) (Units) - (Date yyyy/mm/dd)  <b>Pressure inH2O - (2011/03/14)</b></p> </div> <p><b>Axis:</b> The Y-axis is the units of the parameter. The X-axis is the time in HH:MM:SS format.</p> <p><b>Redraw:</b> Up to four parameters can be trended at the same time. By clicking the check box for a parameter u can show one or four at the same time for easy comparison over a period of time.</p> <div data-bbox="496 1742 1265 1843" data-label="Form"> <table> <tr> <td><input checked="" type="checkbox"/> Pressure inH2O</td> <td><input type="checkbox"/> Graph 3</td> </tr> <tr> <td><input type="checkbox"/> Graph 2</td> <td><input type="checkbox"/> Graph 4</td> </tr> </table> </div> <p>Click “Redraw” and the parameters checked will be shown.</p>	<input checked="" type="checkbox"/> Pressure inH2O	<input type="checkbox"/> Graph 3	<input type="checkbox"/> Graph 2	<input type="checkbox"/> Graph 4
<input checked="" type="checkbox"/> Pressure inH2O	<input type="checkbox"/> Graph 3				
<input type="checkbox"/> Graph 2	<input type="checkbox"/> Graph 4				

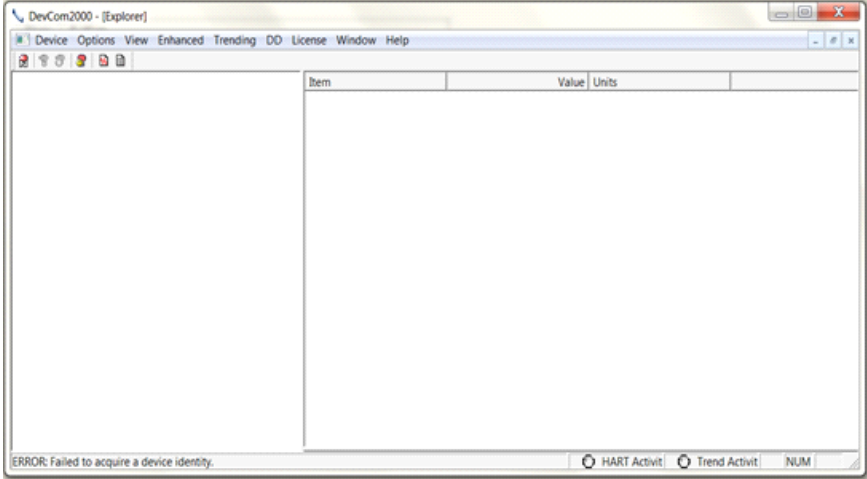
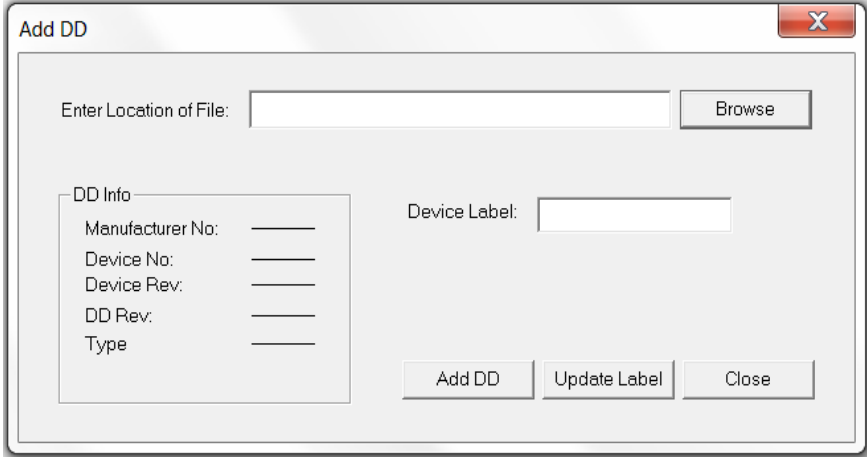
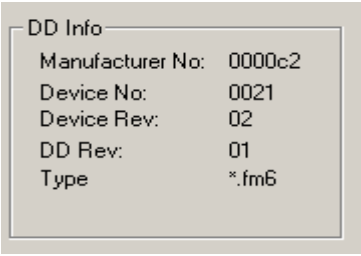
#### 6.13.4 Stop Current Trend

Step	Action
1	<p>Ensure that the application is running and is connected to a device.</p> 
2	<p>Ensure that a trend is in progress. The “Trend Activity” light at the bottom of the screen is on if a trend is in progress. If not then the light will be off.</p> 
3	<p>Select <b>Trending</b> → <b>Stop Current Trend</b> from the main window.</p>
4	<p>You will be asked if you want to stop the current trend. Click “Yes”. This will stop the current trend.</p> 
5	<p>The “Trend Activity” light will now be off.</p> 

## 6.14 DD Functions

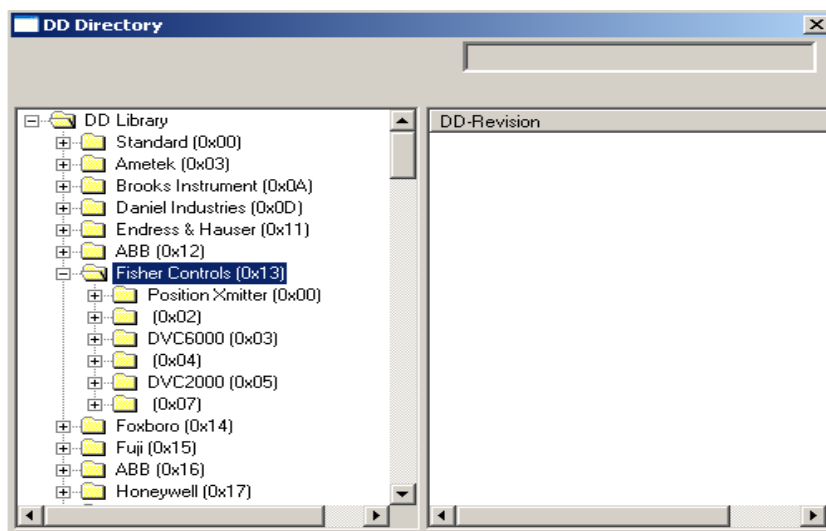
### 6.14.1 Adding a DD

DevCom2000 allows the user to add a DD to the library when necessary. Each DD must be in its appropriate destination for DevCom2000 to find the DD. The format is: “C:\HCF\DDL\Library\xxxxxx\yyyy\” where “xxxxxx” represents the manufacturer ID and “yyyy” represents the device ID. The user does not need to add the directory structure, DevCom2000 does that automatically. To add a DD perform the following steps:

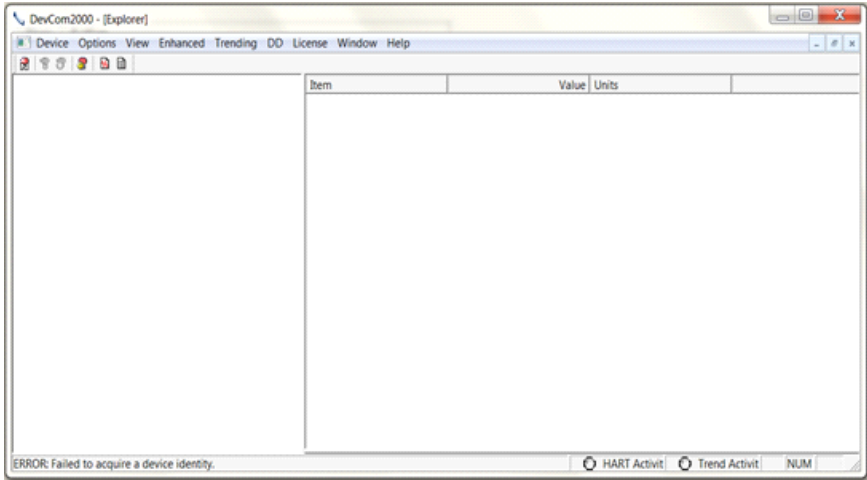

Step	Action
1	<p>Ensure that the application is running, you do not have to be connected to a device to use <b>Add DD</b>.</p> 
2	Select <b>DD</b> → <b>Add DD</b> from the main window.
3	<p>The Add DD dialog will open.</p> 
4	Click “Browse” and go to the location of the DD that is to be added.
5	<p>The “DD Info” section will be populated. Confirm that it is the correct DD. Below is an example of 0000c2/0021/0201.fm6:</p> 
6	Input a “Label” for the DD if necessary. If not Click “Add DD” to add the DD to the library.

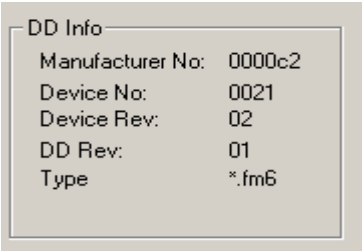
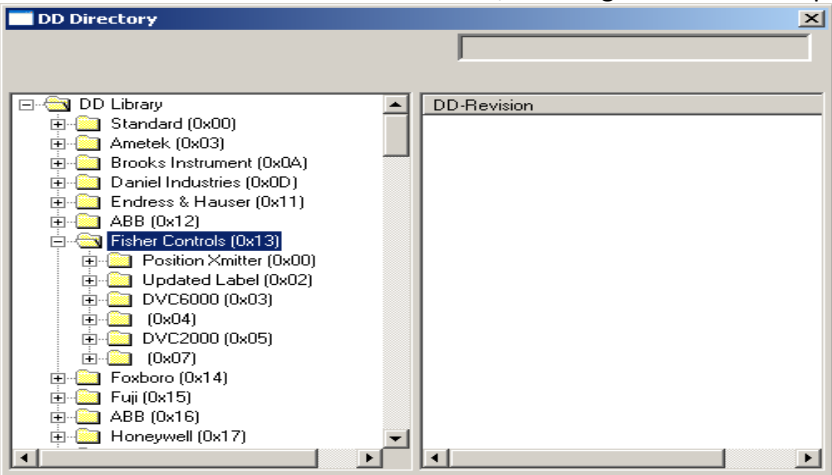
#### 6.14.2 Updating a DD Label

DevCom2000 allows the user to add a Label for a DD if there is not one already defined. Below is an example:



The manufacturer ID of Fisher Controls is 000013. Device IDs 0002, 0004, and 0007 all do not have a label. This is when updating a DD label is useful. To update the label perform the following steps:

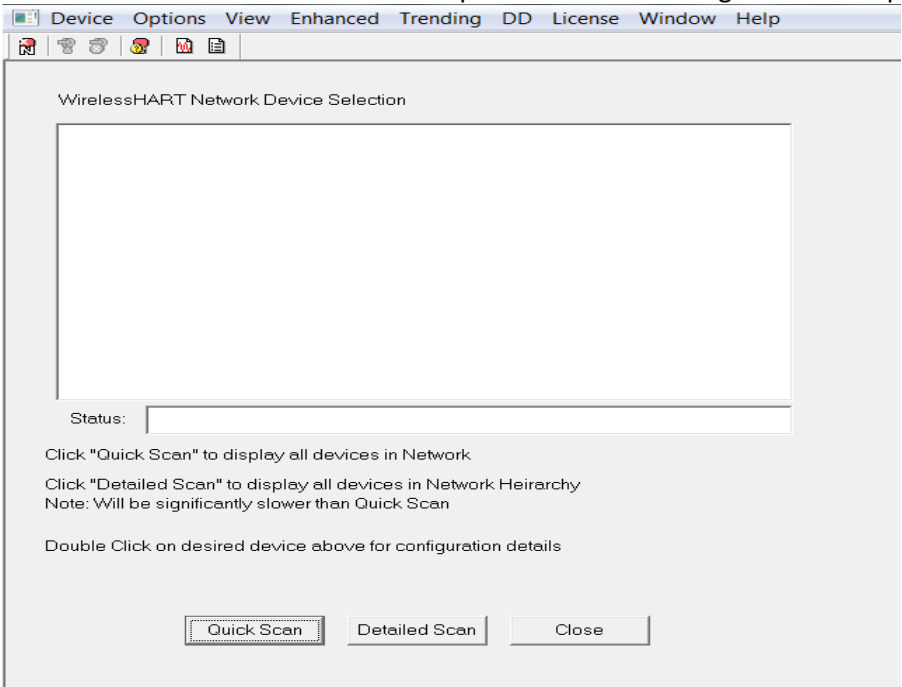
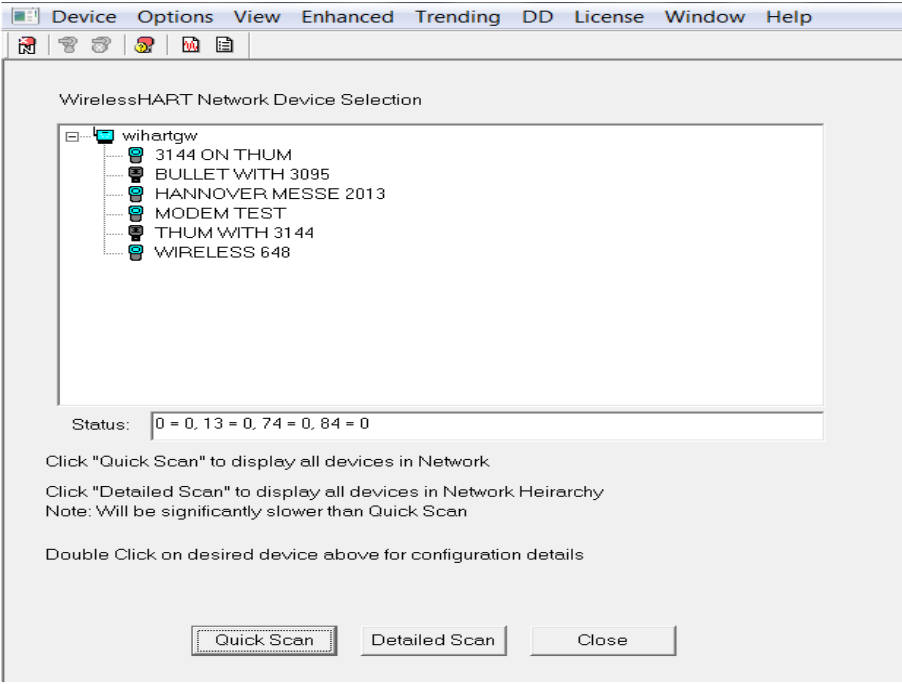
Step	Action
1	<p>Ensure that the application is running, you do not have to be connected to a device to use <b>Add DD</b>.</p> 
2	Select <b>DD → Add DD</b> from the main window.
3	<p>The Add DD dialog will open.</p> 
4	Click "Browse" and go to the location of the DD that is to have the label updated.

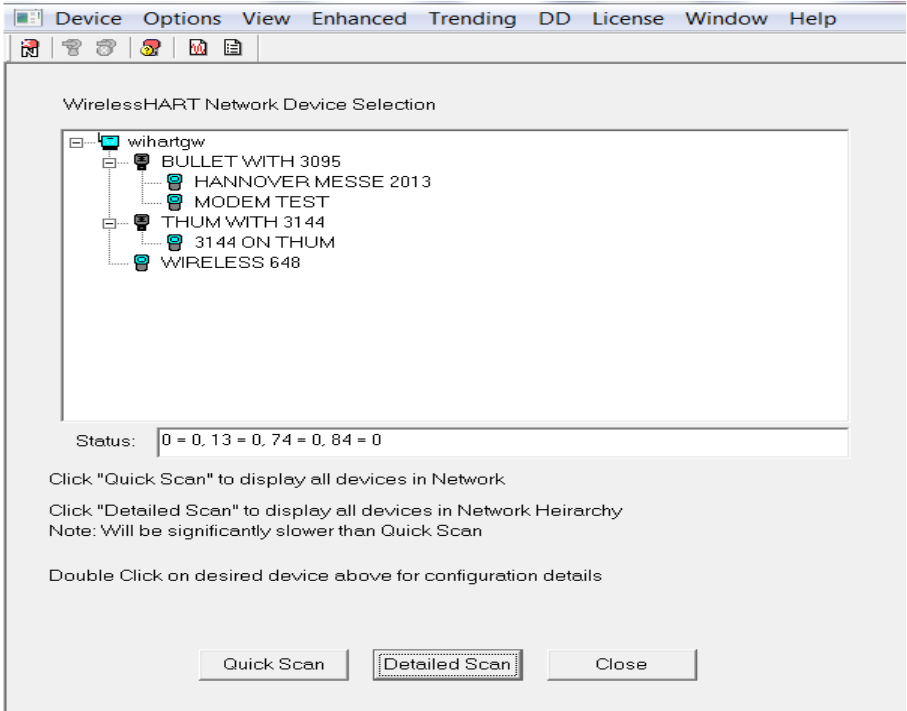



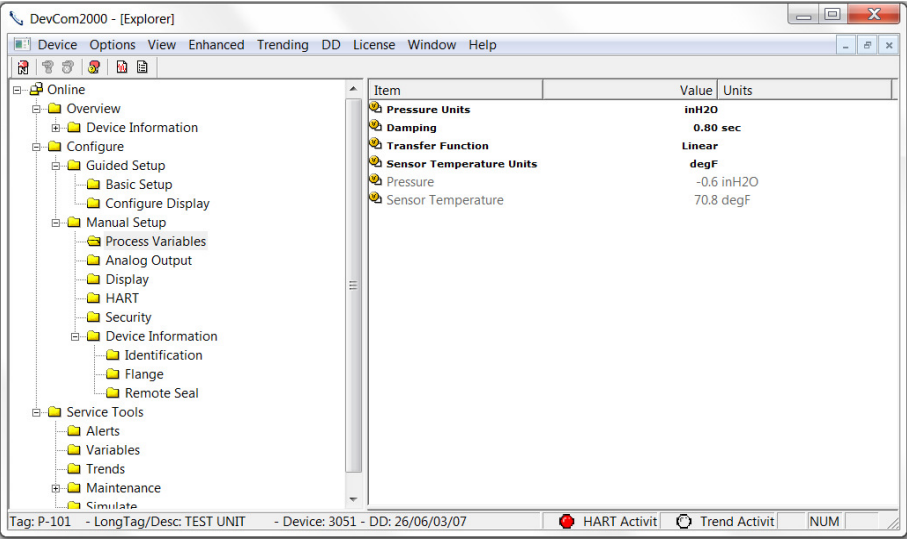
Step	Action
5	<p>The “DD Info” section will be populated. Confirm that it is the correct DD. Below is an example of 0000c2/0021/0201.fm6:</p> 
6	Input a “Label” for the DD if necessary. Click “Update Label” to update the label.
7	<p>Below is the new “Available DDs” sections where 000013/0002 is given the label “Updated Label”:</p> 

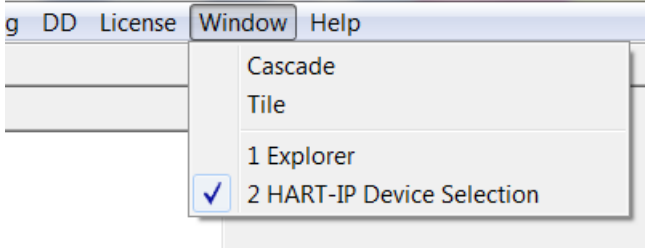
## 6.15 HART-IP Communication

Step	Action
1	<p>Ensure that settings for HART-IP have been made in the Options-&gt;Basic menu. Note that a HART Modem is NOT required, only Ethernet access to the <i>WirelessHART</i> Gateway.</p>



Step	Action
2	<p>Click on “New Device” icon to start the connection process. The following screen will appear.</p> 
3	<p>Click on “Quick Scan” to provide a simple list of all the devices on the <i>WirelessHART</i> network. Below is a sample screen:</p> 

Step	Action
4	<p>Click on "Detailed Scan" to display all the devices as a hierarchy. This will show what transmitters are connected to each <i>WirelessHART</i> adapter. Note that this listing takes significantly longer to generate than the Quick Scan. Below is a sample screen.</p>  <p>For both types of list displays, the following icons are used:</p> <p><b>HART-IP Icons</b></p> <ul style="list-style-type: none"> <li> = Gateway</li> <li> = Adapter, <i>WirelessHART</i></li> <li> = Transmitter</li> </ul>
5	<p>Once a device list has been created, double click on the desired device to configure/review using DevCom2000. Below is a sample screen:</p> 

Step	Action
6	<p>To switch to a different device on the <i>WirelessHART</i> network: <b>Select Window</b> on the MENU bar, then click on <b>HART-IP Device Selection</b> to bring up the <b>Device Menu Tree</b> again.</p> 

## Specifications:

### System Requirements (minimums)

Operating System	Windows 32 and 64 bit versions: NT, 2000, XP, Vista, 7, 8, 8.1, and 10
Processor Speed	Pentium, 600 MHz
Memory	256 MB
Hard Disk Space	500 MB
Monitor	256-color VGA
Communication Port	USB, RS232 or Bluetooth if using a HART Modem. Wi-Fi or Ethernet for HART-IP and <i>WirelessHART</i> ®
HART Modem	Not required if using HART-IP or <i>WirelessHART</i> ®, otherwise a HART modem is required, e.g. HM-USB-ISO, HM-BT-BAT-ER, HM-RS232-ISO, or similar.

### Device Descriptions (DD's)

DD Library	Includes HART Communication Foundation's latest release
Generic DD	Included
Number of devices	>1382 (call for latest information if details required)
DD Updates	Quarterly updates are sent to you automatically for 1 year. Thereafter updates are manually available free of charge from <a href="http://www.hartcomm.org">www.hartcomm.org</a>

### Functions

Monitor PV	
Monitor Multi-variables	
Monitor Device Status	
View and Edit Variables	
Save complete device configuration to text file and PDF file	
Write saved configurations to devices	
Sample Execute Methods:	Trims Calibrations Loop Tests Zero and Span

## Appendix A

### Troubleshooting Guide

For most error messages, there is a selection for “Com Troubleshooter”. This program will guide you through the steps to solve your communication problems. Below is a quick summary:

#### Problem: Will not communicate

##### Hardware Check:

Verify the following

1. Com port number on Preferences Dialog box matches HART interface hardware.
2. Loop power supply is on.
3. Loop resistance between 250 ohms and 1Kohms.
4. Loop current within HART limits.
5. If multi drop configuration, all transmitters in loop have unique addresses.
6. HART interface hardware connected across loop resistor or across transmitter terminals.

##### Software Check:

Sometimes the application does not end cleanly and the communication process is still running in an unknown state. When this happens, it must be closed out before restarting DevCom2000.

Perform the following:

1. Close DevCom2000.
2. Press **CTRL-ALT-DEL** to bring up the Windows Security Screen.
3. Click on Task Manager.
4. Select the Processes tab.
5. In the list of running tasks, select HModemSvr.exe.
6. Click on the End Process button on the dialog box.
7. Restart DevCom2000.

#### Problem: Get the message “Error opening COMx”

Verify the following:

1. Com port number on Preferences Dialog box matches HART interface hardware.
2. HART interface hardware installed.

#### Problem: No data in the Communication Log

Verify the following:

1. Verify that the “HART Activity” LED indicator on the bottom of the screen is flashing red. If not, open a menu that has dynamic data that is being refreshed like PV or AO.
2. For Windows Vista and Windows 7 users, you may need to perform the following:
  - a) Open the “hosts” file using Notepad. It is located in the following directory:  
C:\WINDOWS\system32\drivers\etc\hosts
  - b) Make sure this line appears (without preceding # character)  
127.0.0.1 localhost
  - c) Make sure the following line does NOT appear:  
::1 localhost  
If it is there, comment it out by placing # character in front like this:  
#::1 localhost
  - d) Restart the Communication logger.

Note: To modify this file, you may need to perform the following in Windows:

- a) Go to Control **Panel** → **Folder** Options
- b) Select the View tab
- c) Remove the check next to Hide extensions for known file types
- d) Make the edit changes above
- e) Save the document to your documents
- f) copy the saved document to the above directory
- g) Delete the original hosts file
- h) remove the .txt extension from the new hosts file

3. Turn off firewall protection temporarily to see if it is blocking the TCP/IP communications between DevCom2000 and the Communication Logger.

**Problem:** The system cannot find the path specified error box

Try the following:

1. Verify that the device library (C:\HCF\DDL\Library) is on Drive C:
2. If not, copy to drive C.

**Problem:** Activation by Internet blocked by Firewall

Try the following:

1. Allow one time access to internet via your computer's Firewall settings.
2. Disable Firewall.
3. Use manual activation method.

**Problem:** Active Windows not shown in Windows drop down list

Try the following:

1. Select Window->Cascade or Window->Tile.
2. All Windows will now be shown

**Problem:** When using HART Server for *WirelessHART* in Windows 7 device selection screen doesn't appear

Try the following:

1. Start Windows Explorer.
2. Go to directory "C:\Program Files\ProComSol\Common"
3. Run "RegisterSELECT.bat" as an Administrator

## Appendix B

### Contact Information for HART Expert Ltd

HART Expert Ltd  
125 Greenways,  
Gloucester,  
Gloucestershire,  
GL4 3SA  
United Kingdom

Telephone: +44(0)7966233639

Email: [info@hart-expert.co.uk](mailto:info@hart-expert.co.uk)

Web: [www.hart-expert.co.uk](http://www.hart-expert.co.uk)

### Contact Information for ProComSol Ltd

ProComSol, Ltd  
Process Communications Solutions  
13001 Athens Ave  
Suite 220  
Lakewood, OH 44107  
USA

Phone: 216.221.1550

Fax: 216.221.1554

Email: [sales@procomsol.com](mailto:sales@procomsol.com) [support@procomsol.com](mailto:support@procomsol.com)

Web: [www.procomsol.com](http://www.procomsol.com)